

.156" (3.96mm) Center Crimp Terminal Housing







PHU Series

Features:



- 2-25 Circuits
- With or without locking ramp
- Nylon (UL 94V-2)
- Mates with .045 (1.14mm) square or round pins
- Accepts double cantilever crimp terminal
- Housing available with integrally molded polarizing keys
- Terminal Retention to Housing-8lbs. (3.63kg) minimum

Specifications:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: -25°C ~ + 90°C
- Contact resistance: Initial Value/10mΩ max.
After environmental testing/20mΩ max.
- Insulation resistance: 1,000 MΩ min
- Withstand Voltage: 1500V AC/minute
- Applicable wires: AWG #22 - 18

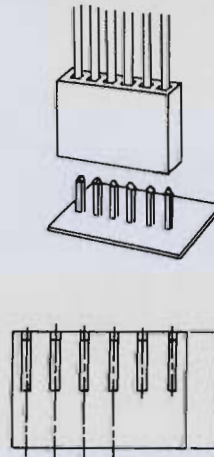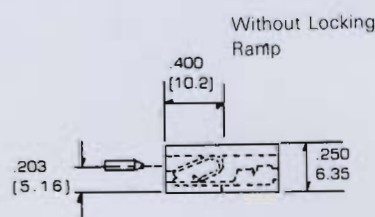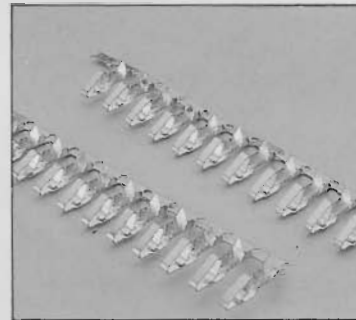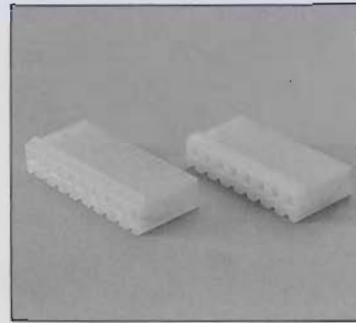

Inches
mm



Dimensional Information PHU Series

Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A
PHU-2	.31 ± .008 7.92 ± 0.20	PHU-6	.93 ± .010 23.67 ± 0.25	PHU-10	1.56 ± .012 39.52 ± 0.30	PHU-14	2.18 ± .014 55.37 ± 0.36	PHU-18	2.804 ± .009 71.22 ± 0.23	PHU-22	3.428 ± .018 87.07 ± 0.46
PHU-3	.46 ± .010 11.79 ± 0.25	PHU-7	1.09 ± .012 27.64 ± 0.30	PHU-11	1.71 ± .012 43.48 ± 0.30	PHU-15	2.34 ± .014 59.33 ± 0.36	PHU-19	2.960 ± .014 65.18 ± 0.36	PHU-23	3.584 ± .018 91.03 ± 0.46
PHU-4	.62 ± .010 15.75 ± 0.25	PHU-8	1.24 ± .012 31.60 ± 0.30	PHU-12	1.87 ± .012 47.45 ± 0.30	PHU-16	2.492 ± .007 63.30 ± 0.18	PHU-20	3.116 ± .018 79.15 ± 0.46	PHU-24	3.740 ± .018 95.00 ± 0.46
PHU-5	.78 ± .010 19.71 ± 0.25	PHU-9	1.40 ± .012 35.56 ± 0.38	PHU-13	2.02 ± .014 51.41 ± 0.36	PHU-17	2.648 ± .008 67.26 ± 0.20	PHU-21	3.272 ± .018 83.11 ± 0.46	PHU-25	3.896 ± .018 98.96 ± 0.46