
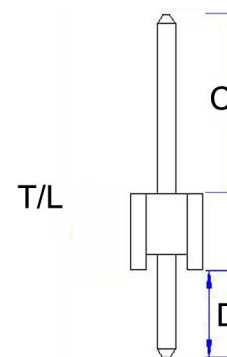


PCB Layout
(Top View)

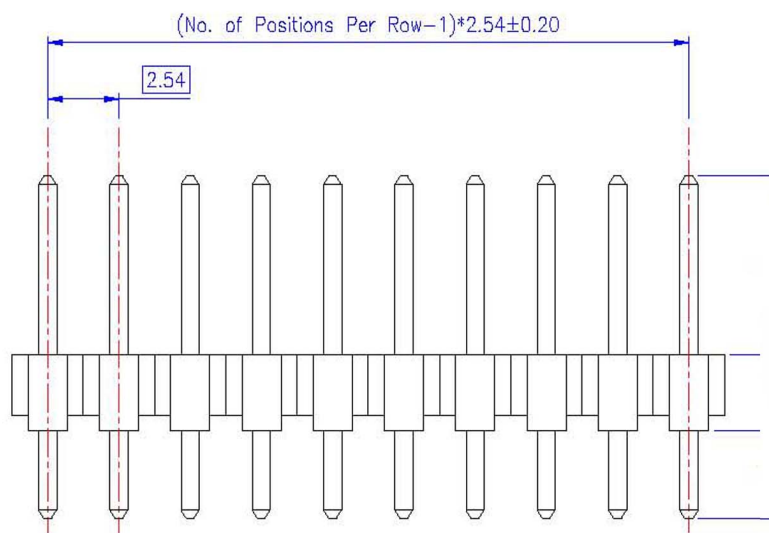

C=6mm D=3mm T/L=11.54mm

Material and Finish	Electrical Characteristics	Mechanical Characteristics
1. Housing: Thermoplastic (UL94V-0), Black. 2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating.	1. Current Rating: 3.0 Amp. Max. 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohm Min. at 1000V DC.	1. Operating Temperature: -55°C~+105°C

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ±	PART NAME 品名 2.54mm PIN HEADER SINGLE ROW XXP STRAIGHT TYPE FULL GOLD (C=6.0mm D=3.0mm) ROHS LOW-LEAD
DWG. 製圖 Yumi	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C2100-XXASXAS0R
DATE 制表日 2007/10/25	PAGE 張數 1 OF 1	REV. 版本 A	