



DATA SHEET

PRODUCT **Metal Oxide Varistor**

SERIES JVR Series

PART NO. _____

QUICK REFERENCE DATA

| PARAMETER | VALUE | UNIT |
|--|-------------|-------|
| Size | Ø5~Ø25 | mm |
| Varistor Voltage V1mA | 18~1800 V | Volt |
| Max. Clamping Voltage | 36~1815 V | Volt |
| Withstanding Surge Current (8/20µs) | 100~20000 A | Amp |
| Energy (10/1000µs) | 0.6~1020 J | Joule |

ISSUE DATE 2022/09/12

REVISION DATE 2022/09/12

REFERENCE NO. _____

RoHS COMPLIANCE ITEM

Halogen Free

Disclaimer:

- This datasheet is downloaded from the Website of Joyin Co., Ltd, and Joyin Co., Ltd. reserves all rights for modification content without further notification.
- All product, specification and data are subject to change without notice.
- Joyin Co., Ltd, its affiliates, agents, employees, and all persons acting on its or their behalf, hereby disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics.
- Joyin Co., Ltd makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. It is the customer's responsibility to validate that a particular product is suitable for use in a particular application.
- To the maximum extent permitted by applicable law, Joyin Co., Ltd disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- If you have any questions, please contact our sales staff.



Features

1. RoHS / Halogen-Free (HF) compliant
2. Body size: $\Phi 5 \sim \Phi 25\text{mm}$
3. Wide operating voltage range: 11Vac ~ 1000 Vac
4. Operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
5. Storage temperature range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
6. Agency recognition: UL 1449 4 th / CUL / VDE/ CQC

Applications

1. Power supply
2. Home appliance
3. Industrial equipment
4. Telecommunication or telephone system
5. Smart meter
6. PLC (Power line communication)
7. Lighting products
8. Photovoltaic industry

How to order

| Part Number Code | | | | | | | | | | | | | | |
|------------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| J | V | R | 1 | 0 | S | 1 | 8 | 1 | K | 6 | 5 | Y | A | W |
| ① | | | ② | | ③ | ④ | | | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | |

| | | | | | | | | |
|---|--------------|--|---|----------------------------|--|---|--------------|---|
| ① | Product Type | JVR series | ④ | Varistor Voltage | 180=18V 181=180V 182=1800V | ⑦ | Lead Spacing | 5 = 5mm 7 = 7.5mm 1 = 10mm |
| ② | Body Size | 05 = 5mm 07 = 7mm 10 = 10mm 14 = 14mm 20 = 20mm 25 = 25mm | ⑤ | Varistor Voltage Tolerance | K=±10% L = ±15% M = ±20% P = ±25% | ⑧ | Lead Style | P = Straight Lead Y = Vertical Kink Lead *Special lead styles per request |
| ③ | Series | N = Standard S = High Surge U = Ultra Surge | ⑥ | Lead Diameter | 6 = 0.6mm 8 = 0.8mm 1 = 1.0mm | ⑨ | Packaging | 50 = 5± 1.0mm for Straight lead 5± 0.5mm for Kink lead U4 = 24mm min. for Bulk and Kink lead U5 = 25mm min. for Bulk and Straight lead AW = H0 16mm for Ammo and Kink lead AY = H0 20mm for Ammo and Straight lead RW = H0 16mm for T / R and Kink lead RY = H0 20mm for T / R and Straight lead *Special spec per request. |


Standard Series Specification

Agency Approvals

| Agency | UL | CUL | VDE | | CQC | |
|------------------|-------------------------------------|-------------------------------------|---|---|--|--|
| Agency Approvals | UL1449 4 th Edition | CSA 22.2 No. 269.5-17 | IEC61051-1 IEC61051-2 IEC61051-2-2 | IEC61051-1 IEC61051-2 IEC61051-2-2 IEC62368-1:2018/G.8.1 | GB/T10193-1997 GB/T10194-1997 | GB4943.1-2011 GB/T10193-1997 GB/T10194-1997 GB8898-2011 |
| Title | Transient Voltage Surge Suppressors | Transient Voltage Surge Suppressors | Varistors for use in electronic equipment | | Engaged in Voluntary Product Certification | |
| File No. | VZCA2.E325508 | VZCA8.E325508 | 5937 | | CQC07001019159/9161/9162/9163/9164 | |
| Symbols | ☆ | | ○ | ● | □ | ■ |




Ø 5mm

Rating and Characteristics

| Part No. | Varistor Voltage at 0.1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|---------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) |  |
| JVR 05N 180M | 18 | ±20% | 11 | 14 | 40 | 1 | 100 | 0.1 | 0.01 | 0.6 | ☆ ○ □ |
| JVR 05N 220L | 22 | ±15% | 14 | 18 | 48 | 1 | 100 | 0.1 | 0.01 | 0.7 | ☆ ○ □ |
| JVR 05N 270K | 27 | ±10% | 17 | 22 | 60 | 1 | 100 | 0.1 | 0.01 | 0.9 | ☆ ○ □ |
| JVR 05N 330K | 33 | ±10% | 20 | 26 | 73 | 1 | 100 | 0.1 | 0.01 | 1.1 | ☆ ○ □ |
| JVR 05N 390K | 39 | ±10% | 25 | 31 | 86 | 1 | 100 | 0.1 | 0.01 | 1.2 | ☆ ○ □ |
| JVR 05N 470K | 47 | ±10% | 30 | 38 | 104 | 1 | 100 | 0.1 | 0.01 | 1.5 | ☆ ○ □ |
| JVR 05N 560K | 56 | ±10% | 35 | 45 | 123 | 1 | 100 | 0.1 | 0.01 | 1.8 | ☆ ○ □ |
| JVR 05N 680K | 68 | ±10% | 40 | 56 | 150 | 1 | 100 | 0.1 | 0.01 | 2.1 | ☆ ○ □ |
| JVR 05N 820K | 82 | ±10% | 50 | 65 | 145 | 5 | 400 | 0.1 | 0.1 | 2.8 | ☆ ○ □ |
| JVR 05N 101K | 100 | ±10% | 60 | 85 | 175 | 5 | 400 | 0.1 | 0.1 | 3.5 | ☆ ○ □ |
| JVR 05N 121K | 120 | ±10% | 75 | 100 | 210 | 5 | 400 | 0.1 | 0.1 | 4 | ☆ ○ □ |
| JVR 05N 151K | 150 | ±10% | 95 | 125 | 260 | 5 | 400 | 0.1 | 0.1 | 5.5 | ☆ ○ □ |
| JVR 05N 181K | 180 | ±10% | 115 | 150 | 320 | 5 | 400 | 0.1 | 0.1 | 6.5 | ☆ ○ □ |
| JVR 05N 201K | 200 | ±10% | 130 | 170 | 355 | 5 | 400 | 0.1 | 0.1 | 7.1 | ☆ ○ □ |
| JVR 05N 221K | 220 | ±10% | 140 | 180 | 380 | 5 | 400 | 0.1 | 0.1 | 7.8 | ☆ ○ □ |
| JVR 05N 241K | 240 | ±10% | 150 | 200 | 415 | 5 | 400 | 0.1 | 0.1 | 8.4 | ☆ ○ □ |
| JVR 05N 271K | 270 | ±10% | 175 | 225 | 475 | 5 | 400 | 0.1 | 0.1 | 9.9 | ☆ ○ □ |
| JVR 05N 301K | 300 | ±10% | 195 | 250 | 525 | 5 | 400 | 0.1 | 0.1 | 10.5 | ☆ ○ □ |
| JVR 05N 331K | 330 | ±10% | 210 | 275 | 575 | 5 | 400 | 0.1 | 0.1 | 11.5 | ☆ ○ □ |
| JVR 05N 361K | 360 | ±10% | 230 | 300 | 620 | 5 | 400 | 0.1 | 0.1 | 13 | ☆ ○ □ |
| JVR 05N 391K | 390 | ±10% | 250 | 320 | 675 | 5 | 400 | 0.1 | 0.1 | 15 | ☆ ○ □ |
| JVR 05N 431K | 430 | ±10% | 275 | 350 | 745 | 5 | 400 | 0.1 | 0.1 | 16.5 | ☆ ○ □ |
| JVR 05N 471K | 470 | ±10% | 300 | 385 | 810 | 5 | 400 | 0.1 | 0.1 | 17.5 | ☆ ○ □ |
| JVR 05N 511K | 510 | ±10% | 320 | 418 | 880 | 5 | 400 | 0.1 | 0.1 | 18.5 | ☆ ○ □ |
| JVR 05N 561K | 560 | ±10% | 350 | 460 | 940 | 5 | 400 | 0.1 | 0.1 | 19.5 | ☆ ○ □ |
| JVR 05N 621K | 620 | ±10% | 385 | 505 | 1050 | 5 | 400 | 0.1 | 0.1 | 20.5 | ☆ ○ □ |
| JVR 05N 681K | 680 | ±10% | 420 | 560 | 1150 | 5 | 400 | 0.1 | 0.1 | 21.5 | ☆ ○ □ |
| JVR 05N 751K | 750 | ±10% | 460 | 615 | 1290 | 5 | 400 | 0.1 | 0.1 | 22.5 | ☆ ○ □ |

Ø 7mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) |    |
| JVR 07N 180M | 18 | ±20% | 11 | 14 | 40 | 2.5 | 250 | 0.15 | 0.02 | 1.2 | ☆ ○ □ |
| JVR 07N 220L | 22 | ±15% | 14 | 18 | 48 | 2.5 | 250 | 0.15 | 0.02 | 1.4 | ☆ ○ □ |
| JVR 07N 270K | 27 | ±10% | 17 | 22 | 60 | 2.5 | 250 | 0.15 | 0.02 | 1.7 | ☆ ○ □ |
| JVR 07N 330K | 33 | ±10% | 20 | 26 | 73 | 2.5 | 250 | 0.15 | 0.02 | 2.2 | ☆ ○ □ |
| JVR 07N 390K | 39 | ±10% | 25 | 31 | 86 | 2.5 | 250 | 0.15 | 0.02 | 2.4 | ☆ ○ □ |
| JVR 07N 470K | 47 | ±10% | 30 | 38 | 104 | 2.5 | 250 | 0.15 | 0.02 | 3.0 | ☆ ○ □ |
| JVR 07N 560K | 56 | ±10% | 35 | 45 | 123 | 2.5 | 250 | 0.15 | 0.02 | 3.5 | ☆ ○ □ |
| JVR 07N 680K | 68 | ±10% | 40 | 56 | 150 | 2.5 | 250 | 0.15 | 0.02 | 4.3 | ☆ ○ □ |
| JVR 07N 820K | 82 | ±10% | 50 | 65 | 145 | 10 | 1200 | 0.5 | 0.25 | 5.5 | ☆ ○ □ |
| JVR 07N 101K | 100 | ±10% | 60 | 85 | 175 | 10 | 1200 | 0.5 | 0.25 | 7.0 | ☆ ○ □ |
| JVR 07N 121K | 120 | ±10% | 75 | 100 | 210 | 10 | 1200 | 0.5 | 0.25 | 8.0 | ☆ ○ □ |
| JVR 07N 151K | 150 | ±10% | 95 | 125 | 260 | 10 | 1200 | 0.5 | 0.25 | 11.0 | ☆ ○ □ |
| JVR 07N 181K | 180 | ±10% | 115 | 150 | 320 | 10 | 1200 | 0.5 | 0.25 | 13.0 | ☆ ○ □ |
| JVR 07N 201K | 200 | ±10% | 130 | 170 | 355 | 10 | 1200 | 0.5 | 0.25 | 14.3 | ☆ ○ □ |
| JVR 07N 221K | 220 | ±10% | 140 | 180 | 380 | 10 | 1200 | 0.5 | 0.25 | 15.5 | ☆ ○ □ |
| JVR 07N 241K | 240 | ±10% | 150 | 200 | 415 | 10 | 1200 | 0.5 | 0.25 | 16.8 | ☆ ○ □ |
| JVR 07N 271K | 270 | ±10% | 175 | 225 | 475 | 10 | 1200 | 0.5 | 0.25 | 19.8 | ☆ ○ □ |
| JVR 07N 301K | 300 | ±10% | 195 | 250 | 525 | 10 | 1200 | 0.5 | 0.25 | 21.0 | ☆ ○ □ |
| JVR 07N 331K | 330 | ±10% | 210 | 275 | 575 | 10 | 1200 | 0.5 | 0.25 | 23.0 | ☆ ○ □ |
| JVR 07N 361K | 360 | ±10% | 230 | 300 | 620 | 10 | 1200 | 0.5 | 0.25 | 26.0 | ☆ ○ □ |
| JVR 07N 391K | 390 | ±10% | 250 | 320 | 675 | 10 | 1200 | 0.5 | 0.25 | 30.0 | ☆ ○ □ |
| JVR 07N 431K | 430 | ±10% | 275 | 350 | 745 | 10 | 1200 | 0.5 | 0.25 | 33.0 | ☆ ○ □ |
| JVR 07N 471K | 470 | ±10% | 300 | 385 | 810 | 10 | 1200 | 0.5 | 0.25 | 35.0 | ☆ ○ □ |
| JVR 07N 511K | 510 | ±10% | 320 | 418 | 880 | 10 | 1200 | 0.5 | 0.25 | 37.0 | ☆ ○ □ |
| JVR 07N 561K | 560 | ±10% | 350 | 460 | 940 | 10 | 1200 | 0.5 | 0.25 | 39.0 | ☆ ○ □ |
| JVR 07N 621K | 620 | ±10% | 385 | 505 | 1050 | 10 | 1200 | 0.5 | 0.25 | 41.0 | ☆ ○ □ |
| JVR 07N 681K | 680 | ±10% | 420 | 560 | 1150 | 10 | 1200 | 0.5 | 0.25 | 43.0 | ☆ ○ □ |
| JVR 07N 751K | 750 | ±10% | 460 | 615 | 1290 | 10 | 1200 | 0.5 | 0.25 | 45.0 | ☆ ○ □ |
| JVR 07N 781K | 780 | ±10% | 485 | 640 | 1290 | 10 | 1200 | 0.5 | 0.25 | 46.0 | ☆ ○ □ |
| JVR 07N 821K | 820 | ±10% | 510 | 670 | 1355 | 10 | 1200 | 0.5 | 0.25 | 47.0 | ☆ ○ □ |




Ø 10mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|-----------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | UL US, D'E, CQC |
| JVR 10N 180M | 18 | ±20% | 11 | 14 | 36 | 5 | 500 | 0.25 | 0.05 | 2.4 | ☆ ○ □ |
| JVR 10N 220L | 22 | ±15% | 14 | 18 | 43 | 5 | 500 | 0.25 | 0.05 | 2.7 | ☆ ○ □ |
| JVR 10N 270K | 27 | ±10% | 17 | 22 | 53 | 5 | 500 | 0.25 | 0.05 | 3.5 | ☆ ○ □ |
| JVR 10N 330K | 33 | ±10% | 20 | 26 | 65 | 5 | 500 | 0.25 | 0.05 | 4.4 | ☆ ○ □ |
| JVR 10N 390K | 39 | ±10% | 25 | 31 | 77 | 5 | 500 | 0.25 | 0.05 | 4.7 | ☆ ○ □ |
| JVR 10N 470K | 47 | ±10% | 30 | 38 | 93 | 5 | 500 | 0.25 | 0.05 | 6.0 | ☆ ○ □ |
| JVR 10N 560K | 56 | ±10% | 35 | 45 | 110 | 5 | 500 | 0.25 | 0.05 | 7.0 | ☆ ○ □ |
| JVR 10N 680K | 68 | ±10% | 40 | 56 | 135 | 5 | 500 | 0.25 | 0.05 | 8.5 | ☆ ○ □ |
| JVR 10N 820K | 82 | ±10% | 50 | 65 | 135 | 25 | 2500 | 1.5 | 0.4 | 11.0 | ☆ ○ □ |
| JVR 10N 101K | 100 | ±10% | 60 | 85 | 165 | 25 | 2500 | 1.5 | 0.4 | 14.0 | ☆ ○ □ |
| JVR 10N 121K | 120 | ±10% | 75 | 100 | 200 | 25 | 2500 | 1.5 | 0.4 | 16.0 | ☆ ○ □ |
| JVR 10N 151K | 150 | ±10% | 95 | 125 | 250 | 25 | 2500 | 1.5 | 0.4 | 22.0 | ☆ ○ □ |
| JVR 10N 181K | 180 | ±10% | 115 | 150 | 300 | 25 | 2500 | 1.5 | 0.4 | 26.0 | ☆ ● □ |
| JVR 10N 201K | 200 | ±10% | 130 | 170 | 340 | 25 | 2500 | 1.5 | 0.4 | 28.5 | ☆ ● ■ |
| JVR 10N 221K | 220 | ±10% | 140 | 180 | 360 | 25 | 2500 | 1.5 | 0.4 | 31.0 | ☆ ● ■ |
| JVR 10N 241K | 240 | ±10% | 150 | 200 | 395 | 25 | 2500 | 1.5 | 0.4 | 33.5 | ☆ ● ■ |
| JVR 10N 271K | 270 | ±10% | 175 | 225 | 455 | 25 | 2500 | 1.5 | 0.4 | 39.5 | ☆ ● ■ |
| JVR 10N 301K | 300 | ±10% | 195 | 250 | 505 | 25 | 2500 | 1.5 | 0.4 | 42.0 | ☆ ● ■ |
| JVR 10N 331K | 330 | ±10% | 210 | 275 | 550 | 25 | 2500 | 1.5 | 0.4 | 46.0 | ☆ ● ■ |
| JVR 10N 361K | 360 | ±10% | 230 | 300 | 595 | 25 | 2500 | 1.5 | 0.4 | 52.0 | ☆ ● ■ |
| JVR 10N 391K | 390 | ±10% | 250 | 320 | 650 | 25 | 2500 | 1.5 | 0.4 | 60.0 | ☆ ● ■ |
| JVR 10N 431K | 430 | ±10% | 275 | 350 | 710 | 25 | 2500 | 1.5 | 0.4 | 66.0 | ☆ ● ■ |
| JVR 10N 471K | 470 | ±10% | 300 | 385 | 775 | 25 | 2500 | 1.5 | 0.4 | 70.0 | ☆ ● ■ |
| JVR 10N 511K | 510 | ±10% | 320 | 418 | 842 | 25 | 2500 | 1.5 | 0.4 | 74.0 | ☆ ● ■ |
| JVR 10N 561K | 560 | ±10% | 350 | 460 | 920 | 25 | 2500 | 1.5 | 0.4 | 78.0 | ☆ ● ■ |
| JVR 10N 621K | 620 | ±10% | 385 | 505 | 1025 | 25 | 2500 | 1.5 | 0.4 | 82.0 | ☆ ● ■ |
| JVR 10N 681K | 680 | ±10% | 420 | 560 | 1120 | 25 | 2500 | 1.5 | 0.4 | 86.0 | ☆ ● ■ |
| JVR 10N 751K | 750 | ±10% | 460 | 615 | 1240 | 25 | 2500 | 1.5 | 0.4 | 90.0 | ☆ ● ■ |
| JVR 10N 781K | 780 | ±10% | 485 | 640 | 1290 | 25 | 2500 | 1.5 | 0.4 | 92.0 | ☆ ● ■ |
| JVR 10N 821K | 820 | ±10% | 510 | 670 | 1355 | 25 | 2500 | 1.5 | 0.4 | 94.0 | ☆ ● ■ |
| JVR 10N 911K | 910 | ±10% | 550 | 745 | 1500 | 25 | 2500 | 1.5 | 0.4 | 102.0 | ☆ ● ■ |
| JVR 10N 102K | 1000 | ±10% | 625 | 825 | 1650 | 25 | 2500 | 1.5 | 0.4 | 112.0 | ☆ ● ■ |
| JVR 10N 112K | 1100 | ±10% | 680 | 895 | 1815 | 25 | 2500 | 1.5 | 0.4 | 124.0 | ☆ ● ■ |
| JVR 10N 122K | 1200 | ±10% | 720 | 975 | 1980 | 25 | 2500 | 1.5 | 0.4 | 134.0 | ☆ ○ ■ |
| JVR 10N 142K | 1400 | ±10% | 825 | 1135 | 2310 | 25 | 2500 | 1.5 | 0.4 | 148.0 | ☆ ○ ■ |
| JVR 10N 162K | 1600 | ±10% | 920 | 1300 | 2640 | 25 | 2500 | 1.5 | 0.4 | 162.0 | ☆ ○ ■ |
| JVR 10N 182K | 1800 | ±10% | 1000 | 1465 | 2970 | 25 | 2500 | 1.5 | 0.4 | 174.0 | ☆ ○ ■ |

Ø 14mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) |    |
| JVR 14N 180M | 18 | ±20% | 11 | 14 | 36 | 10 | 1000 | 1 | 0.1 | 4.7 | ☆ ○ □ |
| JVR 14N 220L | 22 | ±15% | 14 | 18 | 43 | 10 | 1000 | 1 | 0.1 | 5.4 | ☆ ○ □ |
| JVR 14N 270K | 27 | ±10% | 17 | 22 | 53 | 10 | 1000 | 1 | 0.1 | 6.9 | ☆ ○ □ |
| JVR 14N 330K | 33 | ±10% | 20 | 26 | 65 | 10 | 1000 | 1 | 0.1 | 8.8 | ☆ ○ □ |
| JVR 14N 390K | 39 | ±10% | 25 | 31 | 77 | 10 | 1000 | 1 | 0.1 | 9.4 | ☆ ○ □ |
| JVR 14N 470K | 47 | ±10% | 30 | 38 | 93 | 10 | 1000 | 1 | 0.1 | 12.0 | ☆ ○ □ |
| JVR 14N 560K | 56 | ±10% | 35 | 45 | 110 | 10 | 1000 | 1 | 0.1 | 14.0 | ☆ ○ □ |
| JVR 14N 680K | 68 | ±10% | 40 | 56 | 135 | 10 | 1000 | 1 | 0.1 | 17.0 | ☆ ○ □ |
| JVR 14N 820K | 82 | ±10% | 50 | 65 | 135 | 50 | 4500 | 3 | 0.6 | 22.0 | ☆ ○ □ |
| JVR 14N 101K | 100 | ±10% | 60 | 85 | 165 | 50 | 4500 | 3 | 0.6 | 28.0 | ☆ ○ □ |
| JVR 14N 121K | 120 | ±10% | 75 | 100 | 200 | 50 | 4500 | 3 | 0.6 | 32.0 | ☆ ○ □ |
| JVR 14N 151K | 150 | ±10% | 95 | 125 | 250 | 50 | 4500 | 3 | 0.6 | 44.0 | ☆ ○ □ |
| JVR 14N 181K | 180 | ±10% | 115 | 150 | 300 | 50 | 4500 | 3 | 0.6 | 52.0 | ☆ ● □ |
| JVR 14N 201K | 200 | ±10% | 130 | 170 | 340 | 50 | 4500 | 3 | 0.6 | 57.0 | ☆ ● ■ |
| JVR 14N 221K | 220 | ±10% | 140 | 180 | 360 | 50 | 4500 | 3 | 0.6 | 62.0 | ☆ ● ■ |
| JVR 14N 241K | 240 | ±10% | 150 | 200 | 395 | 50 | 4500 | 3 | 0.6 | 67.0 | ☆ ● ■ |
| JVR 14N 271K | 270 | ±10% | 175 | 225 | 455 | 50 | 4500 | 3 | 0.6 | 79 | ☆ ● ■ |
| JVR 14N 301K | 300 | ±10% | 195 | 250 | 505 | 50 | 4500 | 3 | 0.6 | 84.0 | ☆ ● ■ |
| JVR 14N 331K | 330 | ±10% | 210 | 275 | 550 | 50 | 4500 | 3 | 0.6 | 92.0 | ☆ ● ■ |
| JVR 14N 361K | 360 | ±10% | 230 | 300 | 595 | 50 | 4500 | 3 | 0.6 | 104.0 | ☆ ● ■ |
| JVR 14N 391K | 390 | ±10% | 250 | 320 | 650 | 50 | 4500 | 3 | 0.6 | 120.0 | ☆ ● ■ |
| JVR 14N 431K | 430 | ±10% | 275 | 350 | 710 | 50 | 4500 | 3 | 0.6 | 132.0 | ☆ ● ■ |
| JVR 14N 471K | 470 | ±10% | 300 | 385 | 775 | 50 | 4500 | 3 | 0.6 | 140.0 | ☆ ● ■ |
| JVR 14N 511K | 510 | ±10% | 320 | 418 | 842 | 50 | 4500 | 3 | 0.6 | 148.0 | ☆ ● ■ |
| JVR 14N 561K | 560 | ±10% | 350 | 460 | 920 | 50 | 4500 | 3 | 0.6 | 156.0 | ☆ ● ■ |
| JVR 14N 621K | 620 | ±10% | 385 | 505 | 1025 | 50 | 4500 | 3 | 0.6 | 164.0 | ☆ ● ■ |
| JVR 14N 681K | 680 | ±10% | 420 | 560 | 1120 | 50 | 4500 | 3 | 0.6 | 172.0 | ☆ ● ■ |
| JVR 14N 751K | 750 | ±10% | 460 | 615 | 1240 | 50 | 4500 | 3 | 0.6 | 180.0 | ☆ ● ■ |
| JVR 14N 781K | 780 | ±10% | 485 | 640 | 1290 | 50 | 4500 | 3 | 0.6 | 184.0 | ☆ ● ■ |
| JVR 14N 821K | 820 | ±10% | 510 | 670 | 1355 | 50 | 4500 | 3 | 0.6 | 188.0 | ☆ ● ■ |
| JVR 14N 911K | 910 | ±10% | 550 | 745 | 1500 | 50 | 4500 | 3 | 0.6 | 204.0 | ☆ ● ■ |
| JVR 14N 102K | 1000 | ±10% | 625 | 825 | 1650 | 50 | 4500 | 3 | 0.6 | 224.0 | ☆ ● ■ |
| JVR 14N 112K | 1100 | ±10% | 680 | 895 | 1815 | 50 | 4500 | 3 | 0.6 | 248.0 | ☆ ● ■ |
| JVR 14N 122K | 1200 | ±10% | 720 | 975 | 1980 | 50 | 4500 | 2 | 0.6 | 268.0 | ☆ ● ■ |
| JVR 14N 142K | 1400 | ±10% | 825 | 1135 | 2310 | 50 | 4500 | 2 | 0.6 | 300.0 | ☆ ● ■ |
| JVR 14N 162K | 1600 | ±10% | 920 | 1300 | 2640 | 50 | 4500 | 2 | 0.6 | 328.0 | ☆ ● ■ |
| JVR 14N 182K | 1800 | ±10% | 1000 | 1465 | 2970 | 50 | 4500 | 2 | 0.6 | 348.0 | ☆ ● ■ |

Ø 20mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | |
| JVR 20N 220M | 22 | ±20% | 14 | 18 | 43 | 20 | 2000 | 2 | 0.2 | 8 | ☆ ○ □ |
| JVR 20N 270M | 27 | ±20% | 17 | 22 | 53 | 20 | 2000 | 2 | 0.2 | 10 | ☆ ○ □ |
| JVR 20N 330M | 33 | ±20% | 20 | 26 | 65 | 20 | 2000 | 2 | 0.2 | 12 | ☆ ○ □ |
| JVR 20N 390L | 39 | ±15% | 25 | 31 | 77 | 20 | 2000 | 2 | 0.2 | 14 | ☆ ○ □ |
| JVR 20N 470L | 47 | ±15% | 30 | 38 | 93 | 20 | 2000 | 2 | 0.2 | 17 | ☆ ○ □ |
| JVR 20N 560L | 56 | ±15% | 35 | 45 | 110 | 20 | 2000 | 2 | 0.2 | 20 | ☆ ○ □ |
| JVR 20N 680L | 68 | ±15% | 40 | 56 | 135 | 20 | 2000 | 2 | 0.2 | 24 | ☆ ○ □ |
| JVR 20N 820L | 82 | ±15% | 50 | 65 | 135 | 100 | 6500 | 3 | 1 | 44 | ☆ ○ □ |
| JVR 20N 101K | 100 | ±10% | 60 | 85 | 165 | 100 | 6500 | 3 | 1 | 56 | ☆ ○ □ |
| JVR 20N 121K | 120 | ±10% | 75 | 100 | 200 | 100 | 6500 | 3 | 1 | 64 | ☆ ○ □ |
| JVR 20N 151K | 150 | ±10% | 95 | 125 | 250 | 100 | 6500 | 3 | 1 | 88 | ☆ ○ □ |
| JVR 20N 181K | 180 | ±10% | 115 | 150 | 300 | 100 | 6500 | 3 | 1 | 104 | ☆ ● □ |
| JVR 20N 201K | 200 | ±10% | 130 | 170 | 340 | 100 | 6500 | 3 | 1 | 114 | ☆ ● ■ |
| JVR 20N 221K | 220 | ±10% | 140 | 180 | 360 | 100 | 6500 | 3 | 1 | 124 | ☆ ● ■ |
| JVR 20N 241K | 240 | ±10% | 150 | 200 | 395 | 100 | 6500 | 3 | 1 | 134 | ☆ ● ■ |
| JVR 20N 271K | 270 | ±10% | 175 | 225 | 455 | 100 | 6500 | 3 | 1 | 158 | ☆ ● ■ |
| JVR 20N 301K | 300 | ±10% | 195 | 250 | 505 | 100 | 6500 | 3 | 1 | 168 | ☆ ● ■ |
| JVR 20N 331K | 330 | ±10% | 210 | 275 | 550 | 100 | 6500 | 3 | 1 | 184 | ☆ ● ■ |
| JVR 20N 361K | 360 | ±10% | 230 | 300 | 595 | 100 | 6500 | 3 | 1 | 208 | ☆ ● ■ |
| JVR 20N 391K | 390 | ±10% | 250 | 320 | 650 | 100 | 6500 | 3 | 1 | 240 | ☆ ● ■ |
| JVR 20N 431K | 430 | ±10% | 275 | 350 | 710 | 100 | 6500 | 3 | 1 | 264 | ☆ ● ■ |
| JVR 20N 471K | 470 | ±10% | 300 | 385 | 775 | 100 | 6500 | 3 | 1 | 280 | ☆ ● ■ |
| JVR 20N 511K | 510 | ±10% | 320 | 418 | 842 | 100 | 6500 | 3 | 1 | 296 | ☆ ● ■ |
| JVR 20N 561K | 560 | ±10% | 350 | 460 | 920 | 100 | 6500 | 3 | 1 | 312 | ☆ ● ■ |
| JVR 20N 621K | 620 | ±10% | 385 | 505 | 1025 | 100 | 6500 | 3 | 1 | 328 | ☆ ● ■ |
| JVR 20N 681K | 680 | ±10% | 420 | 560 | 1120 | 100 | 6500 | 3 | 1 | 344 | ☆ ● ■ |
| JVR 20N 751K | 750 | ±10% | 460 | 615 | 1240 | 100 | 6500 | 3 | 1 | 360 | ☆ ● ■ |
| JVR 20N 781K | 780 | ±10% | 485 | 640 | 1290 | 100 | 6500 | 3 | 1 | 368 | ☆ ● ■ |
| JVR 20N 821K | 820 | ±10% | 510 | 670 | 1355 | 100 | 6500 | 3 | 1 | 376 | ☆ ● ■ |
| JVR 20N 911K | 910 | ±10% | 550 | 745 | 1500 | 100 | 6500 | 3 | 1 | 408 | ☆ ● ■ |
| JVR 20N 102K | 1000 | ±10% | 625 | 825 | 1650 | 100 | 6500 | 3 | 1 | 448 | ☆ ● ■ |
| JVR 20N 112K | 1100 | ±10% | 680 | 895 | 1815 | 100 | 6500 | 3 | 1 | 496 | ☆ ● ■ |
| JVR 20N 122K | 1200 | ±10% | 720 | 975 | 1980 | 100 | 6500 | 3 | 1 | 528 | ☆ ● ■ |
| JVR 20N 142K | 1400 | ±10% | 825 | 1135 | 2310 | 100 | 6500 | 3 | 1 | 596 | ☆ ● ■ |
| JVR 20N 162K | 1600 | ±10% | 920 | 1300 | 2640 | 100 | 6500 | 3 | 1 | 656 | ☆ ● ■ |
| JVR 20N 182K | 1800 | ±10% | 1000 | 1465 | 2970 | 100 | 6500 | 3 | 1 | 695 | ☆ ● ■ |

Ø 25mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | |
| JVR 25N 201K | 200 | ±10% | 130 | 170 | 355 | 150 | 20000 | 5 | 1.2 | 190 | ☆ ● |
| JVR 25N 221K | 220 | ±10% | 140 | 180 | 380 | 150 | 20000 | 5 | 1.2 | 205 | ☆ ● |
| JVR 25N 241K | 240 | ±10% | 150 | 200 | 415 | 150 | 20000 | 5 | 1.2 | 225 | ☆ ● |
| JVR 25N 271K | 270 | ±10% | 175 | 225 | 445 | 150 | 20000 | 5 | 1.2 | 255 | ☆ ● |
| JVR 25N 301K | 300 | ±10% | 195 | 250 | 495 | 150 | 20000 | 5 | 1.2 | 280 | ☆ ● |
| JVR 25N 331K | 330 | ±10% | 210 | 275 | 545 | 150 | 20000 | 5 | 1.2 | 305 | ☆ ● |
| JVR 25N 361K | 360 | ±10% | 230 | 300 | 595 | 150 | 20000 | 5 | 1.2 | 330 | ☆ ● |
| JVR 25N 391K | 390 | ±10% | 250 | 320 | 645 | 150 | 20000 | 5 | 1.2 | 360 | ☆ ● |
| JVR 25N 431K | 430 | ±10% | 275 | 350 | 710 | 150 | 20000 | 5 | 1.2 | 380 | ☆ ● |
| JVR 25N 471K | 470 | ±10% | 300 | 385 | 775 | 150 | 20000 | 5 | 1.2 | 400 | ☆ ● |
| JVR 25N 511K | 510 | ±10% | 320 | 418 | 840 | 150 | 20000 | 5 | 1.2 | 420 | ☆ ● |
| JVR 25N 561K | 560 | ±10% | 350 | 460 | 925 | 150 | 20000 | 5 | 1.2 | 440 | ☆ ● |
| JVR 25N 621K | 620 | ±10% | 385 | 505 | 1025 | 150 | 20000 | 5 | 1.2 | 460 | ☆ ● |
| JVR 25N 681K | 680 | ±10% | 420 | 560 | 1125 | 150 | 20000 | 5 | 1.2 | 480 | ☆ ● |
| JVR 25N 751K | 750 | ±10% | 460 | 615 | 1240 | 150 | 20000 | 5 | 1.2 | 520 | ☆ ● |
| JVR 25N 781K | 780 | ±10% | 485 | 640 | 1290 | 150 | 20000 | 5 | 1.2 | 540 | ☆ ● |
| JVR 25N 821K | 820 | ±10% | 510 | 670 | 1360 | 150 | 20000 | 5 | 1.2 | 570 | ☆ ● |
| JVR 25N 911K | 910 | ±10% | 550 | 745 | 1500 | 150 | 20000 | 5 | 1.2 | 620 | ☆ ● |


High Surge Series Specification

Agency Approvals

| Agency | UL | CUL | VDE | | CQC | |
|------------------|-------------------------------------|-------------------------------------|---|---|--|--|
| Agency Approvals | UL1449 4 th Edition | CSA 22.2 No. 269.5-17 | IEC61051-1 IEC61051-2 IEC61051-2-2 | IEC61051-1 IEC61051-2 IEC61051-2-2 IEC62368-1:2018/G.8.1 | GB/T10193-1997 GB/T10194-1997 | GB4943.1-2011 GB/T10193-1997 GB/T10194-1997 GB8898-2011 |
| Title | Transient Voltage Surge Suppressors | Transient Voltage Surge Suppressors | Varistors for use in electronic equipment | | Engaged in Voluntary Product Certification | |
| File No. | VZCA2.E325508 | VZCA8.E325508 | 40004658 | | CQC07001019159/9161/9162/9163/9164 | |
| Symbols | ☆ | | ○ | ● | □ | ■ |


Ø 5mm

Rating and Characteristics

| Part No. | Varistor Voltage at 0.1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|---------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) |  |
| JVR 05S 180M | 18 | ±20% | 11 | 14 | 40 | 1 | 250 | 0.1 | 0.01 | 0.7 | ☆ ○ □ |
| JVR 05S 220L | 22 | ±15% | 14 | 18 | 48 | 1 | 250 | 0.1 | 0.01 | 0.8 | ☆ ○ □ |
| JVR 05S 270K | 27 | ±10% | 17 | 22 | 60 | 1 | 250 | 0.1 | 0.01 | 1.1 | ☆ ○ □ |
| JVR 05S 330K | 33 | ±10% | 20 | 26 | 73 | 1 | 250 | 0.1 | 0.01 | 1.3 | ☆ ○ □ |
| JVR 05S 390K | 39 | ±10% | 25 | 31 | 86 | 1 | 250 | 0.1 | 0.01 | 1.5 | ☆ ○ □ |
| JVR 05S 470K | 47 | ±10% | 30 | 38 | 104 | 1 | 250 | 0.1 | 0.01 | 1.8 | ☆ ○ □ |
| JVR 05S 560K | 56 | ±10% | 35 | 45 | 123 | 1 | 250 | 0.1 | 0.01 | 2.2 | ☆ ○ □ |
| JVR 05S 680K | 68 | ±10% | 40 | 56 | 150 | 1 | 250 | 0.1 | 0.01 | 2.6 | ☆ ○ □ |
| JVR 05S 820K | 82 | ±10% | 50 | 65 | 145 | 5 | 800 | 0.1 | 0.1 | 3.5 | ☆ ○ □ |
| JVR 05S 101K | 100 | ±10% | 60 | 85 | 175 | 5 | 800 | 0.1 | 0.1 | 4.5 | ☆ ○ □ |
| JVR 05S 121K | 120 | ±10% | 75 | 100 | 210 | 5 | 800 | 0.1 | 0.1 | 5.5 | ☆ ○ □ |
| JVR 05S 151K | 150 | ±10% | 95 | 125 | 260 | 5 | 800 | 0.1 | 0.1 | 6.5 | ☆ ○ □ |
| JVR 05S 181K | 180 | ±10% | 115 | 150 | 320 | 5 | 800 | 0.1 | 0.1 | 8.0 | ☆ ○ □ |
| JVR 05S 201K | 200 | ±10% | 130 | 170 | 355 | 5 | 800 | 0.1 | 0.1 | 8.5 | ☆ ○ □ |
| JVR 05S 221K | 220 | ±10% | 140 | 180 | 380 | 5 | 800 | 0.1 | 0.1 | 9.0 | ☆ ○ □ |
| JVR 05S 241K | 240 | ±10% | 150 | 200 | 415 | 5 | 800 | 0.1 | 0.1 | 10.5 | ☆ ○ □ |
| JVR 05S 271K | 270 | ±10% | 175 | 225 | 475 | 5 | 800 | 0.1 | 0.1 | 11 | ☆ ○ □ |
| JVR 05S 301K | 300 | ±10% | 195 | 250 | 525 | 5 | 800 | 0.1 | 0.1 | 12.0 | ☆ ○ □ |
| JVR 05S 331K | 330 | ±10% | 210 | 275 | 575 | 5 | 800 | 0.1 | 0.1 | 13 | ☆ ○ □ |
| JVR 05S 361K | 360 | ±10% | 230 | 300 | 620 | 5 | 800 | 0.1 | 0.1 | 16 | ☆ ○ □ |
| JVR 05S 391K | 390 | ±10% | 250 | 320 | 675 | 5 | 800 | 0.1 | 0.1 | 17 | ☆ ○ □ |
| JVR 05S 431K | 430 | ±10% | 275 | 350 | 745 | 5 | 800 | 0.1 | 0.1 | 20 | ☆ ○ □ |
| JVR 05S 471K | 470 | ±10% | 300 | 385 | 810 | 5 | 800 | 0.1 | 0.1 | 21 | ☆ ○ □ |
| JVR 05S 511K | 510 | ±10% | 320 | 418 | 880 | 5 | 800 | 0.1 | 0.1 | 22 | ☆ ○ □ |
| JVR 05S 561K | 560 | ±10% | 350 | 460 | 940 | 5 | 800 | 0.1 | 0.1 | 25 | ☆ ○ □ |
| JVR 05S 621K | 620 | ±10% | 385 | 505 | 1050 | 5 | 800 | 0.1 | 0.1 | 27 | ☆ ○ □ |
| JVR 05S 681K | 680 | ±10% | 420 | 560 | 1150 | 5 | 800 | 0.1 | 0.1 | 28 | ☆ ○ □ |
| JVR 05S 751K | 750 | ±10% | 460 | 615 | 1290 | 5 | 800 | 0.1 | 0.1 | 29 | ☆ ○ □ |

Ø 7mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) |  |
| JVR 07S 180M | 18 | ±20% | 11 | 14 | 40 | 2.5 | 500 | 0.15 | 0.02 | 1.5 | ☆ ○ □ |
| JVR 07S 220L | 22 | ±15% | 14 | 18 | 48 | 2.5 | 500 | 0.15 | 0.02 | 1.7 | ☆ ○ □ |
| JVR 07S 270K | 27 | ±10% | 17 | 22 | 60 | 2.5 | 500 | 0.15 | 0.02 | 2.1 | ☆ ○ □ |
| JVR 07S 330K | 33 | ±10% | 20 | 26 | 73 | 2.5 | 500 | 0.15 | 0.02 | 2.8 | ☆ ○ □ |
| JVR 07S 390K | 39 | ±10% | 25 | 31 | 86 | 2.5 | 500 | 0.15 | 0.02 | 3.0 | ☆ ○ □ |
| JVR 07S 470K | 47 | ±10% | 30 | 38 | 104 | 2.5 | 500 | 0.15 | 0.02 | 3.8 | ☆ ○ □ |
| JVR 07S 560K | 56 | ±10% | 35 | 45 | 123 | 2.5 | 500 | 0.15 | 0.02 | 4.4 | ☆ ○ □ |
| JVR 07S 680K | 68 | ±10% | 40 | 56 | 150 | 2.5 | 500 | 0.15 | 0.02 | 5.4 | ☆ ○ □ |
| JVR 07S 820K | 82 | ±10% | 50 | 65 | 145 | 10 | 1750 | 1.0 | 0.25 | 7.0 | ☆ ○ □ |
| JVR 07S 101K | 100 | ±10% | 60 | 85 | 175 | 10 | 1750 | 1.0 | 0.25 | 9.0 | ☆ ○ □ |
| JVR 07S 121K | 120 | ±10% | 75 | 100 | 210 | 10 | 1750 | 1.0 | 0.25 | 11.0 | ☆ ○ □ |
| JVR 07S 151K | 150 | ±10% | 95 | 125 | 260 | 10 | 1750 | 1.0 | 0.25 | 13.0 | ☆ ○ □ |
| JVR 07S 181K | 180 | ±10% | 115 | 150 | 320 | 10 | 1750 | 1.0 | 0.25 | 16.0 | ☆ ○ □ |
| JVR 07S 201K | 200 | ±10% | 130 | 170 | 355 | 10 | 1750 | 1.0 | 0.25 | 17.5 | ☆ ○ □ |
| JVR 07S 221K | 220 | ±10% | 140 | 180 | 380 | 10 | 1750 | 1.0 | 0.25 | 19.0 | ☆ ○ □ |
| JVR 07S 241K | 240 | ±10% | 150 | 200 | 415 | 10 | 1750 | 1.0 | 0.25 | 21.0 | ☆ ○ □ |
| JVR 07S 271K | 270 | ±10% | 175 | 225 | 475 | 10 | 1750 | 1.0 | 0.25 | 24 | ☆ ○ □ |
| JVR 07S 301K | 300 | ±10% | 195 | 250 | 525 | 10 | 1750 | 1.0 | 0.25 | 26.0 | ☆ ○ □ |
| JVR 07S 331K | 330 | ±10% | 210 | 275 | 575 | 10 | 1750 | 1.0 | 0.25 | 28 | ☆ ○ □ |
| JVR 07S 361K | 360 | ±10% | 230 | 300 | 620 | 10 | 1750 | 1.0 | 0.25 | 32 | ☆ ○ □ |
| JVR 07S 391K | 390 | ±10% | 250 | 320 | 675 | 10 | 1750 | 1.0 | 0.25 | 35 | ☆ ○ □ |
| JVR 07S 431K | 430 | ±10% | 275 | 350 | 745 | 10 | 1750 | 1.0 | 0.25 | 40 | ☆ ○ □ |
| JVR 07S 471K | 470 | ±10% | 300 | 385 | 810 | 10 | 1750 | 1.0 | 0.25 | 42 | ☆ ○ □ |
| JVR 07S 511K | 510 | ±10% | 320 | 418 | 880 | 10 | 1750 | 1.0 | 0.25 | 45 | ☆ ○ □ |
| JVR 07S 561K | 560 | ±10% | 350 | 460 | 940 | 10 | 1750 | 1.0 | 0.25 | 51 | ☆ ○ □ |
| JVR 07S 621K | 620 | ±10% | 385 | 505 | 1050 | 10 | 1750 | 1.0 | 0.25 | 54 | ☆ ○ □ |
| JVR 07S 681K | 680 | ±10% | 420 | 560 | 1150 | 10 | 1750 | 1.0 | 0.25 | 56 | ☆ ○ □ |
| JVR 07S 751K | 750 | ±10% | 460 | 615 | 1290 | 10 | 1750 | 1.0 | 0.25 | 58 | ☆ ○ □ |
| JVR 07S 781K | 780 | ±10% | 485 | 640 | 1290 | 10 | 1750 | 1.0 | 0.25 | 59 | ☆ ○ □ |
| JVR 07S 821K | 820 | ±10% | 510 | 670 | 1355 | 10 | 1750 | 1.0 | 0.25 | 60 | ☆ ○ □ |

Ø 10mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | UL US D'E CQC |
| JVR 10S 180M | 18 | ±20% | 11 | 14 | 36 | 5 | 1000 | 0.5 | 0.05 | 2.6 | ☆ ○ □ |
| JVR 10S 220L | 22 | ±15% | 14 | 18 | 43 | 5 | 1000 | 0.5 | 0.05 | 3.2 | ☆ ○ □ |
| JVR 10S 270K | 27 | ±10% | 17 | 22 | 53 | 5 | 1000 | 0.5 | 0.05 | 3.9 | ☆ ○ □ |
| JVR 10S 330K | 33 | ±10% | 20 | 26 | 65 | 5 | 1000 | 0.5 | 0.05 | 4.8 | ☆ ○ □ |
| JVR 10S 390K | 39 | ±10% | 25 | 31 | 77 | 5 | 1000 | 0.5 | 0.05 | 5.6 | ☆ ○ □ |
| JVR 10S 470K | 47 | ±10% | 30 | 38 | 93 | 5 | 1000 | 0.5 | 0.05 | 6.8 | ☆ ○ □ |
| JVR 10S 560K | 56 | ±10% | 35 | 45 | 110 | 5 | 1000 | 0.5 | 0.05 | 8.1 | ☆ ○ □ |
| JVR 10S 680K | 68 | ±10% | 40 | 56 | 135 | 5 | 1000 | 0.5 | 0.05 | 9.8 | ☆ ○ □ |
| JVR 10S 820K | 82 | ±10% | 50 | 65 | 135 | 25 | 3500 | 1.5 | 0.4 | 14 | ☆ ○ □ |
| JVR 10S 101K | 100 | ±10% | 60 | 85 | 165 | 25 | 3500 | 1.5 | 0.4 | 18 | ☆ ○ □ |
| JVR 10S 121K | 120 | ±10% | 75 | 100 | 200 | 25 | 3500 | 1.5 | 0.4 | 22 | ☆ ○ □ |
| JVR 10S 151K | 150 | ±10% | 95 | 125 | 250 | 25 | 3500 | 1.5 | 0.4 | 25 | ☆ ○ □ |
| JVR 10S 181K | 180 | ±10% | 115 | 150 | 300 | 25 | 3500 | 3 | 0.4 | 32 | ☆ ● □ |
| JVR 10S 201K | 200 | ±10% | 130 | 170 | 340 | 25 | 3500 | 3 | 0.4 | 35 | ☆ ● ■ |
| JVR 10S 221K | 220 | ±10% | 140 | 180 | 360 | 25 | 3500 | 3 | 0.4 | 39 | ☆ ● ■ |
| JVR 10S 241K | 240 | ±10% | 150 | 200 | 395 | 25 | 3500 | 3 | 0.4 | 42 | ☆ ● ■ |
| JVR 10S 271K | 270 | ±10% | 175 | 225 | 455 | 25 | 3500 | 3 | 0.4 | 49 | ☆ ● ■ |
| JVR 10S 301K | 300 | ±10% | 195 | 250 | 505 | 25 | 3500 | 3 | 0.4 | 52 | ☆ ● ■ |
| JVR 10S 331K | 330 | ±10% | 210 | 275 | 550 | 25 | 3500 | 3 | 0.4 | 58 | ☆ ● ■ |
| JVR 10S 361K | 360 | ±10% | 230 | 300 | 595 | 25 | 3500 | 3 | 0.4 | 65 | ☆ ● ■ |
| JVR 10S 391K | 390 | ±10% | 250 | 320 | 650 | 25 | 3500 | 3 | 0.4 | 70 | ☆ ● ■ |
| JVR 10S 431K | 430 | ±10% | 275 | 350 | 710 | 25 | 3500 | 3 | 0.4 | 80 | ☆ ● ■ |
| JVR 10S 471K | 470 | ±10% | 300 | 385 | 775 | 25 | 3500 | 3 | 0.4 | 85 | ☆ ● ■ |
| JVR 10S 511K | 510 | ±10% | 320 | 418 | 842 | 25 | 3500 | 3 | 0.4 | 92 | ☆ ● ■ |
| JVR 10S 561K | 560 | ±10% | 350 | 460 | 920 | 25 | 3500 | 3 | 0.4 | 102 | ☆ ● ■ |
| JVR 10S 621K | 620 | ±10% | 385 | 505 | 1025 | 25 | 3500 | 3 | 0.4 | 107 | ☆ ● ■ |
| JVR 10S 681K | 680 | ±10% | 420 | 560 | 1120 | 25 | 3500 | 3 | 0.4 | 112 | ☆ ● ■ |
| JVR 10S 751K | 750 | ±10% | 460 | 615 | 1240 | 25 | 3500 | 3 | 0.4 | 115 | ☆ ● ■ |
| JVR 10S 781K | 780 | ±10% | 485 | 640 | 1290 | 25 | 3500 | 3 | 0.4 | 116 | ☆ ● ■ |
| JVR 10S 821K | 820 | ±10% | 510 | 670 | 1355 | 25 | 3500 | 3 | 0.4 | 118 | ☆ ● ■ |
| JVR 10S 911K | 910 | ±10% | 550 | 745 | 1500 | 25 | 3500 | 3 | 0.4 | 127 | ☆ ● ■ |
| JVR 10S 102K | 1000 | ±10% | 625 | 825 | 1650 | 25 | 3500 | 3 | 0.4 | 140 | ☆ ● ■ |
| JVR 10S 112K | 1100 | ±10% | 680 | 895 | 1815 | 25 | 3500 | 3 | 0.4 | 155 | ☆ ● ■ |
| JVR 10S 122K | 1200 | ±10% | 720 | 975 | 1980 | 25 | 3500 | 1.5 | 0.4 | 168 | ☆ ● ■ |
| JVR 10S 142K | 1400 | ±10% | 825 | 1135 | 2310 | 25 | 3500 | 1.5 | 0.4 | 195 | ☆ ● ■ |
| JVR 10S 162K | 1600 | ±10% | 920 | 1300 | 2640 | 25 | 3500 | 1.5 | 0.4 | 222 | ☆ ● ■ |
| JVR 10S 182K | 1800 | ±10% | 1000 | 1465 | 2970 | 25 | 3500 | 1.5 | 0.4 | 247 | ☆ ● ■ |

Ø 14mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | UL US D'E CQC |
| JVR 14S 180M | 18 | ±20% | 11 | 14 | 36 | 10 | 2000 | 1 | 0.1 | 5.2 | ☆ ○ □ |
| JVR 14S 220L | 22 | ±15% | 14 | 18 | 43 | 10 | 2000 | 1 | 0.1 | 6.3 | ☆ ○ □ |
| JVR 14S 270K | 27 | ±10% | 17 | 22 | 53 | 10 | 2000 | 1 | 0.1 | 7.8 | ☆ ○ □ |
| JVR 14S 330K | 33 | ±10% | 20 | 26 | 65 | 10 | 2000 | 1 | 0.1 | 9.5 | ☆ ○ □ |
| JVR 14S 390K | 39 | ±10% | 25 | 31 | 77 | 10 | 2000 | 1 | 0.1 | 11 | ☆ ○ □ |
| JVR 14S 470K | 47 | ±10% | 30 | 38 | 93 | 10 | 2000 | 1 | 0.1 | 14 | ☆ ○ □ |
| JVR 14S 560K | 56 | ±10% | 35 | 45 | 110 | 10 | 2000 | 1 | 0.1 | 16 | ☆ ○ □ |
| JVR 14S 680K | 68 | ±10% | 40 | 56 | 135 | 10 | 2000 | 1 | 0.1 | 20 | ☆ ○ □ |
| JVR 14S 820K | 82 | ±10% | 50 | 65 | 135 | 50 | 6000 | 3 | 0.6 | 28 | ☆ ○ □ |
| JVR 14S 101K | 100 | ±10% | 60 | 85 | 165 | 50 | 6000 | 3 | 0.6 | 36 | ☆ ○ □ |
| JVR 14S 121K | 120 | ±10% | 75 | 100 | 200 | 50 | 6000 | 3 | 0.6 | 44 | ☆ ○ □ |
| JVR 14S 151K | 150 | ±10% | 95 | 125 | 250 | 50 | 6000 | 3 | 0.6 | 53 | ☆ ○ □ |
| JVR 14S 181K | 180 | ±10% | 115 | 150 | 300 | 50 | 6000 | 3 | 0.6 | 65 | ☆ ● □ |
| JVR 14S 201K | 200 | ±10% | 130 | 170 | 340 | 50 | 6000 | 3 | 0.6 | 70 | ☆ ● ■ |
| JVR 14S 221K | 220 | ±10% | 140 | 180 | 360 | 50 | 6000 | 3 | 0.6 | 78 | ☆ ● ■ |
| JVR 14S 241K | 240 | ±10% | 150 | 200 | 395 | 50 | 6000 | 3 | 0.6 | 84 | ☆ ● ■ |
| JVR 14S 271K | 270 | ±10% | 175 | 225 | 455 | 50 | 6000 | 3 | 0.6 | 99 | ☆ ● ■ |
| JVR 14S 301K | 300 | ±10% | 195 | 250 | 505 | 50 | 6000 | 3 | 0.6 | 105 | ☆ ● ■ |
| JVR 14S 331K | 330 | ±10% | 210 | 275 | 550 | 50 | 6000 | 3 | 0.6 | 115 | ☆ ● ■ |
| JVR 14S 361K | 360 | ±10% | 230 | 300 | 595 | 50 | 6000 | 3 | 0.6 | 130 | ☆ ● ■ |
| JVR 14S 391K | 390 | ±10% | 250 | 320 | 650 | 50 | 6000 | 3 | 0.6 | 140 | ☆ ● ■ |
| JVR 14S 431K | 430 | ±10% | 275 | 350 | 710 | 50 | 6000 | 3 | 0.6 | 155 | ☆ ● ■ |
| JVR 14S 471K | 470 | ±10% | 300 | 385 | 775 | 50 | 6000 | 3 | 0.6 | 175 | ☆ ● ■ |
| JVR 14S 511K | 510 | ±10% | 320 | 418 | 842 | 50 | 6000 | 3 | 0.6 | 190 | ☆ ● ■ |
| JVR 14S 561K | 560 | ±10% | 350 | 460 | 920 | 50 | 6000 | 3 | 0.6 | 205 | ☆ ● ■ |
| JVR 14S 621K | 620 | ±10% | 385 | 505 | 1025 | 50 | 6000 | 3 | 0.6 | 215 | ☆ ● ■ |
| JVR 14S 681K | 680 | ±10% | 420 | 560 | 1120 | 50 | 6000 | 3 | 0.6 | 225 | ☆ ● ■ |
| JVR 14S 751K | 750 | ±10% | 460 | 615 | 1240 | 50 | 6000 | 3 | 0.6 | 230 | ☆ ● ■ |
| JVR 14S 781K | 780 | ±10% | 485 | 640 | 1290 | 50 | 6000 | 3 | 0.6 | 233 | ☆ ● ■ |
| JVR 14S 821K | 820 | ±10% | 510 | 670 | 1355 | 50 | 6000 | 3 | 0.6 | 235 | ☆ ● ■ |
| JVR 14S 911K | 910 | ±10% | 550 | 745 | 1500 | 50 | 6000 | 3 | 0.6 | 255 | ☆ ● ■ |
| JVR 14S 102K | 1000 | ±10% | 625 | 825 | 1650 | 50 | 6000 | 3 | 0.6 | 283 | ☆ ● ■ |
| JVR 14S 112K | 1100 | ±10% | 680 | 895 | 1815 | 50 | 6000 | 3 | 0.6 | 310 | ☆ ● ■ |
| JVR 14S 122K | 1200 | ±10% | 720 | 975 | 1980 | 50 | 6000 | 2 | 0.6 | 338 | ☆ ● ■ |
| JVR 14S 142K | 1400 | ±10% | 825 | 1135 | 2310 | 50 | 6000 | 2 | 0.6 | 393 | ☆ ● ■ |
| JVR 14S 162K | 1600 | ±10% | 920 | 1300 | 2640 | 50 | 6000 | 2 | 0.6 | 450 | ☆ ● ■ |
| JVR 14S 182K | 1800 | ±10% | 1000 | 1465 | 2970 | 50 | 6000 | 2 | 0.6 | 510 | ☆ ● ■ |

Ø 20mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | UL US D'E CQC |
| JVR 20S 220M | 22 | ±20% | 14 | 18 | 43 | 20 | 3000 | 2 | 0.2 | 16 | ☆ ○ □ |
| JVR 20S 270M | 27 | ±20% | 17 | 22 | 53 | 20 | 3000 | 2 | 0.2 | 19 | ☆ ○ □ |
| JVR 20S 330M | 33 | ±20% | 20 | 26 | 65 | 20 | 3000 | 2 | 0.2 | 24 | ☆ ○ □ |
| JVR 20S 390L | 39 | ±15% | 25 | 31 | 77 | 20 | 3000 | 2 | 0.2 | 28 | ☆ ○ □ |
| JVR 20S 470L | 47 | ±15% | 30 | 38 | 93 | 20 | 3000 | 2 | 0.2 | 34 | ☆ ○ □ |
| JVR 20S 560L | 56 | ±15% | 35 | 45 | 110 | 20 | 3000 | 2 | 0.2 | 41 | ☆ ○ □ |
| JVR 20S 680L | 68 | ±15% | 40 | 56 | 135 | 20 | 3000 | 2 | 0.2 | 49 | ☆ ○ □ |
| JVR 20S 820L | 82 | ±15% | 50 | 65 | 135 | 100 | 10000 | 5 | 1 | 56 | ☆ ○ □ |
| JVR 20S 101K | 100 | ±10% | 60 | 85 | 165 | 100 | 10000 | 5 | 1 | 72 | ☆ ○ □ |
| JVR 20S 121K | 120 | ±10% | 75 | 100 | 200 | 100 | 10000 | 5 | 1 | 88 | ☆ ○ □ |
| JVR 20S 151K | 150 | ±10% | 95 | 125 | 250 | 100 | 10000 | 5 | 1 | 106 | ☆ ○ □ |
| JVR 20S 181K | 180 | ±10% | 115 | 150 | 300 | 100 | 10000 | 5 | 1 | 130 | ☆ ● □ |
| JVR 20S 201K | 200 | ±10% | 130 | 170 | 340 | 100 | 10000 | 5 | 1 | 140 | ☆ ● ■ |
| JVR 20S 221K | 220 | ±10% | 140 | 180 | 360 | 100 | 10000 | 5 | 1 | 155 | ☆ ● ■ |
| JVR 20S 241K | 240 | ±10% | 150 | 200 | 395 | 100 | 10000 | 5 | 1 | 168 | ☆ ● ■ |
| JVR 20S 271K | 270 | ±10% | 175 | 225 | 455 | 100 | 10000 | 5 | 1 | 190 | ☆ ● ■ |
| JVR 20S 301K | 300 | ±10% | 195 | 250 | 505 | 100 | 10000 | 5 | 1 | 210 | ☆ ● ■ |
| JVR 20S 331K | 330 | ±10% | 210 | 275 | 550 | 100 | 10000 | 5 | 1 | 228 | ☆ ● ■ |
| JVR 20S 361K | 360 | ±10% | 230 | 300 | 595 | 100 | 10000 | 5 | 1 | 255 | ☆ ● ■ |
| JVR 20S 391K | 390 | ±10% | 250 | 320 | 650 | 100 | 10000 | 5 | 1 | 275 | ☆ ● ■ |
| JVR 20S 431K | 430 | ±10% | 275 | 350 | 710 | 100 | 10000 | 5 | 1 | 303 | ☆ ● ■ |
| JVR 20S 471K | 470 | ±10% | 300 | 385 | 775 | 100 | 10000 | 5 | 1 | 350 | ☆ ● ■ |
| JVR 20S 511K | 510 | ±10% | 320 | 418 | 842 | 100 | 10000 | 5 | 1 | 382 | ☆ ● ■ |
| JVR 20S 561K | 560 | ±10% | 350 | 460 | 920 | 100 | 10000 | 5 | 1 | 410 | ☆ ● ■ |
| JVR 20S 621K | 620 | ±10% | 385 | 505 | 1025 | 100 | 10000 | 5 | 1 | 420 | ☆ ● ■ |
| JVR 20S 681K | 680 | ±10% | 420 | 560 | 1120 | 100 | 10000 | 5 | 1 | 430 | ☆ ● ■ |
| JVR 20S 751K | 750 | ±10% | 460 | 615 | 1240 | 100 | 10000 | 5 | 1 | 440 | ☆ ● ■ |
| JVR 20S 781K | 780 | ±10% | 485 | 640 | 1290 | 100 | 10000 | 5 | 1 | 450 | ☆ ● ■ |
| JVR 20S 821K | 820 | ±10% | 510 | 670 | 1355 | 100 | 10000 | 5 | 1 | 460 | ☆ ● ■ |
| JVR 20S 911K | 910 | ±10% | 550 | 745 | 1500 | 100 | 10000 | 5 | 1 | 510 | ☆ ● ■ |
| JVR 20S 102K | 1000 | ±10% | 625 | 825 | 1650 | 100 | 10000 | 5 | 1 | 566 | ☆ ● ■ |
| JVR 20S 112K | 1100 | ±10% | 680 | 895 | 1815 | 100 | 10000 | 5 | 1 | 620 | ☆ ● ■ |
| JVR 20S 122K | 1200 | ±10% | 720 | 975 | 1980 | 100 | 10000 | 3 | 1 | 680 | ☆ ● ■ |
| JVR 20S 142K | 1400 | ±10% | 825 | 1135 | 2310 | 100 | 10000 | 3 | 1 | 790 | ☆ ● ■ |
| JVR 20S 162K | 1600 | ±10% | 920 | 1300 | 2640 | 100 | 10000 | 3 | 1 | 905 | ☆ ● ■ |
| JVR 20S 182K | 1800 | ±10% | 1000 | 1465 | 2970 | 100 | 10000 | 3 | 1 | 1020 | ☆ ● ■ |


Ultra Surge Series Specification

Agency Approvals

| Agency | UL | CUL | VDE | | CQC | |
|------------------|-------------------------------------|-------------------------------------|---|---|--|--|
| Agency Approvals | UL1449 4 th Edition | CSA 22.2 No. 269.5-17 | IEC61051-1 IEC61051-2 IEC61051-2-2 | IEC61051-1 IEC61051-2 IEC61051-2-2 IEC62368-1:2018/G.8.1 | GB/T10193-1997 GB/T10194-1997 | GB4943.1-2011 GB/T10193-1997 GB/T10194-1997 GB8898-2011 |
| Title | Transient Voltage Surge Suppressors | Transient Voltage Surge Suppressors | Varistors for use in electronic equipment | | Engaged in Voluntary Product Certification | |
| File No. | VZCA2.E325508 | VZCA8.E325508 | 40046994 | | CQC07001019159/9161/9162/9163/9164 | |
| Symbols | ☆ | | ○ | ● | □ | ■ |

Ø 7mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) |  |
| JVR 07U 181K | 180 | ±10% | 115 | 150 | 300 | 10 | 1800 | 1 | 0.25 | 19 | ☆ ○ □ |
| JVR 07U 201K | 200 | ±10% | 130 | 170 | 340 | 10 | 1800 | 1 | 0.25 | 21 | ☆ ○ □ |
| JVR 07U 221K | 220 | ±10% | 140 | 180 | 360 | 10 | 1800 | 1 | 0.25 | 23 | ☆ ○ □ |
| JVR 07U 241K | 240 | ±10% | 150 | 200 | 395 | 10 | 1800 | 1 | 0.25 | 25 | ☆ ○ □ |
| JVR 07U 271K | 270 | ±10% | 175 | 225 | 455 | 10 | 1800 | 1 | 0.25 | 28 | ☆ ○ □ |
| JVR 07U 301K | 300 | ±10% | 195 | 250 | 505 | 10 | 1800 | 1 | 0.25 | 32 | ☆ ○ □ |
| JVR 07U 331K | 330 | ±10% | 210 | 275 | 550 | 10 | 1800 | 1 | 0.25 | 34 | ☆ ○ □ |
| JVR 07U 361K | 360 | ±10% | 230 | 300 | 595 | 10 | 1800 | 1 | 0.25 | 37 | ☆ ○ □ |
| JVR 07U 391K | 390 | ±10% | 250 | 320 | 650 | 10 | 1800 | 1 | 0.25 | 40 | ☆ ○ □ |
| JVR 07U 431K | 430 | ±10% | 275 | 350 | 710 | 10 | 1800 | 1 | 0.25 | 46 | ☆ ○ □ |
| JVR 07U 471K | 470 | ±10% | 300 | 385 | 775 | 10 | 1800 | 1 | 0.25 | 49 | ☆ ○ □ |
| JVR 07U 511K | 510 | ±10% | 320 | 418 | 842 | 10 | 1800 | 1 | 0.25 | 54 | ☆ ○ □ |
| JVR 07U 561K | 560 | ±10% | 350 | 460 | 920 | 10 | 1800 | 1 | 0.25 | 55 | ☆ ○ □ |
| JVR 07U 621K | 620 | ±10% | 385 | 505 | 1025 | 10 | 1800 | 1 | 0.25 | 59 | ☆ ○ □ |
| JVR 07U 681K | 680 | ±10% | 420 | 560 | 1120 | 10 | 1800 | 1 | 0.25 | 62 | ☆ ○ □ |
| JVR 07U 751K | 750 | ±10% | 460 | 615 | 1240 | 10 | 1800 | 1 | 0.25 | 66 | ☆ ○ □ |
| JVR 07U 781K | 780 | ±10% | 485 | 640 | 1290 | 10 | 1800 | 1 | 0.25 | 68 | ☆ ○ □ |
| JVR 07U 821K | 820 | ±10% | 510 | 670 | 1355 | 10 | 1800 | 1 | 0.25 | 71 | ☆ ○ □ |


Ø 10mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | UL US DVE CQC |
| JVR 10U 181K | 180 | ±10% | 115 | 150 | 300 | 25 | 4500 | 3 | 0.4 | 47 | ☆ ● □ |
| JVR 10U 201K | 200 | ±10% | 130 | 170 | 340 | 25 | 4500 | 3 | 0.4 | 52 | ☆ ● ■ |
| JVR 10U 221K | 220 | ±10% | 140 | 180 | 360 | 25 | 4500 | 3 | 0.4 | 58 | ☆ ● ■ |
| JVR 10U 241K | 240 | ±10% | 150 | 200 | 395 | 25 | 4500 | 3 | 0.4 | 64 | ☆ ● ■ |
| JVR 10U 271K | 270 | ±10% | 175 | 225 | 455 | 25 | 4500 | 3 | 0.4 | 67 | ☆ ● ■ |
| JVR 10U 301K | 300 | ±10% | 195 | 250 | 505 | 25 | 4500 | 3 | 0.4 | 70 | ☆ ● ■ |
| JVR 10U 331K | 330 | ±10% | 210 | 275 | 550 | 25 | 4500 | 3 | 0.4 | 72 | ☆ ● ■ |
| JVR 10U 361K | 360 | ±10% | 230 | 300 | 595 | 25 | 4500 | 3 | 0.4 | 76 | ☆ ● ■ |
| JVR 10U 391K | 390 | ±10% | 250 | 320 | 650 | 25 | 4500 | 3 | 0.4 | 82 | ☆ ● ■ |
| JVR 10U 431K | 430 | ±10% | 275 | 350 | 710 | 25 | 4500 | 3 | 0.4 | 93 | ☆ ● ■ |
| JVR 10U 471K | 470 | ±10% | 300 | 385 | 775 | 25 | 4500 | 3 | 0.4 | 99 | ☆ ● ■ |
| JVR 10U 511K | 510 | ±10% | 320 | 418 | 842 | 25 | 4500 | 3 | 0.4 | 107 | ☆ ● ■ |
| JVR 10U 561K | 560 | ±10% | 350 | 460 | 920 | 25 | 4500 | 3 | 0.4 | 113 | ☆ ● ■ |
| JVR 10U 621K | 620 | ±10% | 385 | 505 | 1025 | 25 | 4500 | 3 | 0.4 | 125 | ☆ ● ■ |
| JVR 10U 681K | 680 | ±10% | 420 | 560 | 1120 | 25 | 4500 | 3 | 0.4 | 128 | ☆ ● ■ |
| JVR 10U 751K | 750 | ±10% | 460 | 615 | 1240 | 25 | 4500 | 3 | 0.4 | 134 | ☆ ● ■ |
| JVR 10U 781K | 780 | ±10% | 485 | 640 | 1290 | 25 | 4500 | 3 | 0.4 | 139 | ☆ ● ■ |
| JVR 10U 821K | 820 | ±10% | 510 | 670 | 1355 | 25 | 4500 | 3 | 0.4 | 146 | ☆ ● ■ |
| JVR 10U 911K | 910 | ±10% | 550 | 745 | 1500 | 25 | 4500 | 3 | 0.4 | 152 | ☆ ● ■ |
| JVR 10U 102K | 1000 | ±10% | 625 | 825 | 1650 | 25 | 4500 | 3 | 0.4 | 170 | ☆ ● ■ |
| JVR 10U 112K | 1100 | ±10% | 680 | 895 | 1815 | 25 | 4500 | 3 | 0.4 | 180 | ☆ ● ■ |

Ø 14mm

Rating and Characteristics


| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) |  |
| JVR 14U 181K | 180 | ±10% | 115 | 150 | 300 | 50 | 8000 | 3 | 0.6 | 60 | ☆ ● □ |
| JVR 14U 201K | 200 | ±10% | 130 | 170 | 340 | 50 | 8000 | 3 | 0.6 | 82 | ☆ ● ■ |
| JVR 14U 221K | 220 | ±10% | 140 | 180 | 360 | 50 | 8000 | 3 | 0.6 | 90 | ☆ ● ■ |
| JVR 14U 241K | 240 | ±10% | 150 | 200 | 395 | 50 | 8000 | 3 | 0.6 | 98 | ☆ ● ■ |
| JVR 14U 271K | 270 | ±10% | 175 | 225 | 455 | 50 | 8000 | 3 | 0.6 | 116 | ☆ ● ■ |
| JVR 14U 301K | 300 | ±10% | 195 | 250 | 505 | 50 | 8000 | 3 | 0.6 | 128 | ☆ ● ■ |
| JVR 14U 331K | 330 | ±10% | 210 | 275 | 550 | 50 | 8000 | 3 | 0.6 | 140 | ☆ ● ■ |
| JVR 14U 361K | 360 | ±10% | 230 | 300 | 595 | 50 | 8000 | 3 | 0.6 | 158 | ☆ ● ■ |
| JVR 14U 391K | 390 | ±10% | 250 | 320 | 650 | 50 | 8000 | 3 | 0.6 | 170 | ☆ ● ■ |
| JVR 14U 431K | 430 | ±10% | 275 | 350 | 710 | 50 | 8000 | 3 | 0.6 | 185 | ☆ ● ■ |
| JVR 14U 471K | 470 | ±10% | 300 | 385 | 775 | 50 | 8000 | 3 | 0.6 | 205 | ☆ ● ■ |
| JVR 14U 511K | 510 | ±10% | 320 | 418 | 842 | 50 | 8000 | 3 | 0.6 | 220 | ☆ ● ■ |
| JVR 14U 561K | 560 | ±10% | 350 | 460 | 920 | 50 | 8000 | 3 | 0.6 | 240 | ☆ ● ■ |
| JVR 14U 621K | 620 | ±10% | 385 | 505 | 1025 | 50 | 8000 | 3 | 0.6 | 250 | ☆ ● ■ |
| JVR 14U 681K | 680 | ±10% | 420 | 560 | 1120 | 50 | 8000 | 3 | 0.6 | 260 | ☆ ● ■ |
| JVR 14U 751K | 750 | ±10% | 460 | 615 | 1240 | 50 | 8000 | 3 | 0.6 | 270 | ☆ ● ■ |
| JVR 14U 781K | 780 | ±10% | 485 | 640 | 1290 | 50 | 8000 | 3 | 0.6 | 274 | ☆ ● ■ |
| JVR 14U 821K | 820 | ±10% | 510 | 670 | 1355 | 50 | 8000 | 3 | 0.6 | 280 | ☆ ● ■ |
| JVR 14U 911K | 910 | ±10% | 550 | 745 | 1500 | 50 | 8000 | 3 | 0.6 | 295 | ☆ ● ■ |
| JVR 14U 102K | 1000 | ±10% | 625 | 825 | 1650 | 50 | 8000 | 3 | 0.6 | 335 | ☆ ● ■ |
| JVR 14U 112K | 1100 | ±10% | 680 | 895 | 1815 | 50 | 8000 | 3 | 0.6 | 360 | ☆ ● ■ |

Ø 20mm

Rating and Characteristics

| Part No. | Varistor Voltage at 1mA | | Maximum Allowable Voltage | | Maximum Clamping Voltage | | Withstanding Surge Current (8/20us) | Nominal Discharge Current (8/20us) | Rated Wattage | Energy (10/1000us) | Certification |
|--------------|-------------------------|-----------|---------------------------|--------|--------------------------|--------|-------------------------------------|------------------------------------|---------------|--------------------|---------------|
| | DC (V) | Tolerance | AC rms (V) | DC (V) | V@ ic (V) | ic (A) | 1 Time (A) | In (KA) | (W) | (J) | |
| JVR 20U 181K | 180 | ±10% | 115 | 150 | 300 | 100 | 13000 | 5 | 1 | 152 | ☆ ● □ |
| JVR 20U 201K | 200 | ±10% | 130 | 170 | 340 | 100 | 13000 | 5 | 1 | 175 | ☆ ● ■ |
| JVR 20U 221K | 220 | ±10% | 140 | 180 | 360 | 100 | 13000 | 5 | 1 | 185 | ☆ ● ■ |
| JVR 20U 241K | 240 | ±10% | 150 | 200 | 395 | 100 | 13000 | 5 | 1 | 198 | ☆ ● ■ |
| JVR 20U 271K | 270 | ±10% | 175 | 225 | 455 | 100 | 13000 | 5 | 1 | 220 | ☆ ● ■ |
| JVR 20U 301K | 300 | ±10% | 195 | 250 | 505 | 100 | 13000 | 5 | 1 | 245 | ☆ ● ■ |
| JVR 20U 331K | 330 | ±10% | 210 | 275 | 550 | 100 | 13000 | 5 | 1 | 268 | ☆ ● ■ |
| JVR 20U 361K | 360 | ±10% | 230 | 300 | 595 | 100 | 13000 | 5 | 1 | 315 | ☆ ● ■ |
| JVR 20U 391K | 390 | ±10% | 250 | 320 | 650 | 100 | 13000 | 5 | 1 | 350 | ☆ ● ■ |
| JVR 20U 431K | 430 | ±10% | 275 | 350 | 710 | 100 | 13000 | 5 | 1 | 380 | ☆ ● ■ |
| JVR 20U 471K | 470 | ±10% | 300 | 385 | 775 | 100 | 13000 | 5 | 1 | 405 | ☆ ● ■ |
| JVR 20U 511K | 510 | ±10% | 320 | 418 | 842 | 100 | 13000 | 5 | 1 | 445 | ☆ ● ■ |
| JVR 20U 561K | 560 | ±10% | 350 | 460 | 920 | 100 | 13000 | 5 | 1 | 475 | ☆ ● ■ |
| JVR 20U 621K | 620 | ±10% | 385 | 505 | 1025 | 100 | 13000 | 5 | 1 | 490 | ☆ ● ■ |
| JVR 20U 681K | 680 | ±10% | 420 | 560 | 1120 | 100 | 13000 | 5 | 1 | 500 | ☆ ● ■ |
| JVR 20U 751K | 750 | ±10% | 460 | 615 | 1240 | 100 | 13000 | 5 | 1 | 525 | ☆ ● ■ |
| JVR 20U 781K | 780 | ±10% | 485 | 640 | 1290 | 100 | 13000 | 5 | 1 | 530 | ☆ ● ■ |
| JVR 20U 821K | 820 | ±10% | 510 | 670 | 1355 | 100 | 13000 | 5 | 1 | 545 | ☆ ● ■ |
| JVR 20U 911K | 910 | ±10% | 550 | 745 | 1500 | 100 | 13000 | 5 | 1 | 595 | ☆ ● ■ |
| JVR 20U 102K | 1000 | ±10% | 625 | 825 | 1650 | 100 | 13000 | 5 | 1 | 650 | ☆ ● ■ |
| JVR 20U 112K | 1100 | ±10% | 680 | 895 | 1815 | 100 | 13000 | 5 | 1 | 720 | ☆ ● ■ |

Dimensions

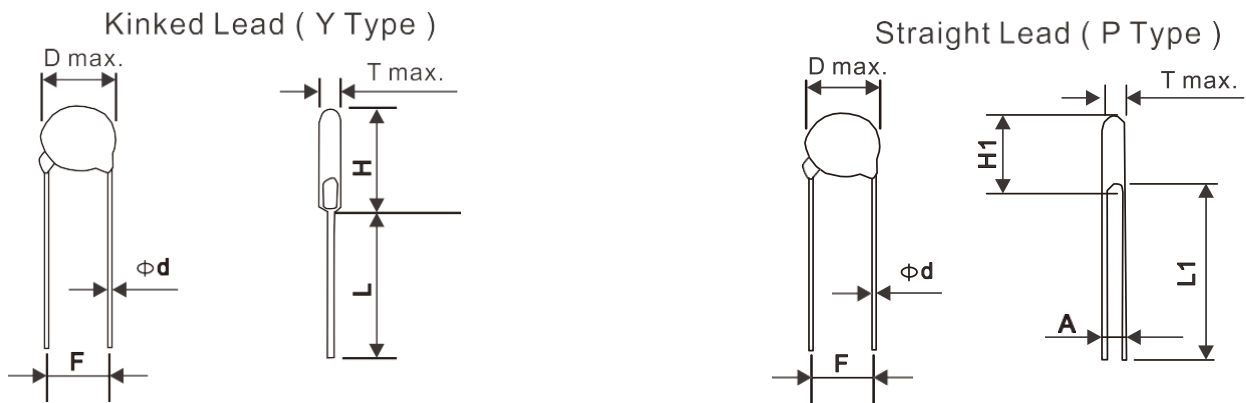

Dimension Table

unit : mm

| Diameter | 5mm | 7mm | 10mm | 14mm | 20mm | 25mm |
|----------|------|------|--------|--------|--------|------|
| D max. | 7.5 | 9.0 | 12.5 | 16.5 | 23 | 29 |
| d ± 0.05 | 0.6 | 0.6 | 0.8 | 0.8 | 1.0 | 1.0 |
| F ± 1.0 | 5.0 | 5.0 | 7.5 | 7.5 | 10.0 | 10.0 |
| H max. | 11.0 | 12.5 | 17/*19 | 22/*23 | 28/*29 | 36 |
| L1 min. | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 20.0 |
| L min. | 24.0 | 24.0 | 24.0 | 24.0 | 24.0 | 20.0 |



*Just for 182K

Table of Tmax., A & H1 max.



| Diameter | 5mm | | | 7mm | | | 10mm | | | 14mm | | | 20mm | | | 25mm | | | |
|----------|----------|--------|---------|---------|--------|---------|---------|--------|---------|---------|--------|---------|---------|--------|---------|---------|--------|---------|---------|
| | Type No. | T max. | A ± 0.8 | H1 max. | T max. | A ± 0.8 | H1 max. | T max. | A ± 0.8 | H1 max. | T max. | A ± 0.8 | H1 max. | T max. | A ± 0.8 | H1 max. | T max. | A ± 0.8 | H1 max. |
| 180M | 3.9 | 0.8 | 10.5 | 3.9 | 0.8 | 12.0 | 4.3 | 0.8 | 15.0 | 4.3 | 0.9 | 19.5 | / | / | / | / | / | / | / |
| 220M/L | 4.1 | 0.9 | 10.5 | 4.1 | 0.9 | 12.0 | 4.5 | 0.9 | 15.0 | 4.5 | 1.0 | 19.5 | 4.9 | 1.0 | 26.5 | / | / | / | / |
| 270M/K | 4.3 | 0.9 | 10.5 | 4.3 | 0.9 | 12.0 | 4.7 | 0.9 | 15.0 | 4.7 | 1.0 | 19.5 | 5.1 | 1.1 | 26.5 | / | / | / | / |
| 330M/K | 4.5 | 1.0 | 10.5 | 4.5 | 1.0 | 12.0 | 4.9 | 1.0 | 15.0 | 4.9 | 1.2 | 19.5 | 5.3 | 1.2 | 26.5 | / | / | / | / |
| 390L/K | 4.5 | 1.2 | 10.5 | 4.5 | 1.2 | 12.0 | 5.1 | 1.2 | 15.0 | 5.1 | 1.4 | 19.5 | 5.4 | 1.4 | 26.5 | / | / | / | / |
| 470L/K | 4.8 | 1.2 | 10.5 | 4.8 | 1.2 | 12.0 | 5.3 | 1.2 | 15.0 | 5.4 | 1.4 | 19.5 | 5.6 | 1.4 | 26.5 | / | / | / | / |
| 560L/K | 4.8 | 1.4 | 10.5 | 4.8 | 1.4 | 12.0 | 5.5 | 1.4 | 15.0 | 5.6 | 1.6 | 19.5 | 5.6 | 1.6 | 26.5 | / | / | / | / |
| 680L/K | 5.1 | 1.7 | 10.5 | 5.1 | 1.7 | 12.0 | 5.7 | 1.6 | 15.0 | 5.6 | 1.9 | 19.5 | 5.9 | 1.9 | 26.5 | / | / | / | / |
| 820K | 3.8 | 0.8 | 10.5 | 3.8 | 0.8 | 12.0 | 4.3 | 0.8 | 15.0 | 4.3 | 1.0 | 19.5 | 4.7 | 1.1 | 26.5 | / | / | / | / |
| 101K | 3.9 | 0.8 | 10.5 | 3.9 | 0.8 | 12.0 | 4.4 | 0.8 | 15.0 | 4.5 | 1.0 | 19.5 | 4.9 | 1.2 | 26.5 | / | / | / | / |
| 121K | 4.1 | 0.9 | 10.5 | 4.1 | 0.9 | 12.0 | 4.5 | 0.9 | 15.0 | 4.6 | 1.1 | 19.5 | 5.1 | 1.3 | 26.5 | / | / | / | / |
| 151K | 4.5 | 1.2 | 10.5 | 4.5 | 1.2 | 12.0 | 4.9 | 1.2 | 15.0 | 5.0 | 1.4 | 19.5 | 5.4 | 1.6 | 26.5 | / | / | / | / |
| 181K | 3.9 | 1.0 | 10.5 | 3.9 | 1.0 | 12.0 | 4.3 | 1.0 | 15.0 | 4.3 | 1.2 | 19.5 | 5.0 | 1.4 | 26.5 | / | / | / | / |
| 201K | 4.0 | 1.0 | 10.5 | 4.0 | 1.0 | 12.0 | 4.4 | 1.0 | 15.0 | 4.4 | 1.2 | 19.5 | 5.1 | 1.4 | 26.5 | 5.4 | 2.5 | 35 | |
| 221K | 4.0 | 1.1 | 10.5 | 4.0 | 1.1 | 12.0 | 4.4 | 1.1 | 15.0 | 4.4 | 1.3 | 19.5 | 5.2 | 1.5 | 26.5 | 5.6 | 2.6 | 35 | |
| 241K | 4.2 | 1.1 | 10.5 | 4.2 | 1.3 | 12.0 | 4.6 | 1.3 | 15.0 | 4.6 | 1.5 | 19.5 | 5.3 | 1.7 | 26.5 | 5.7 | 2.8 | 35 | |
| 271K | 4.4 | 1.3 | 10.5 | 4.4 | 1.4 | 12.0 | 4.8 | 1.4 | 15.0 | 4.8 | 1.5 | 19.5 | 5.5 | 1.9 | 26.5 | 6.0 | 3.0 | 35 | |
| 301K | 4.4 | 1.3 | 10.5 | 4.4 | 1.5 | 12.0 | 4.8 | 1.6 | 15.0 | 4.8 | 1.7 | 19.5 | 5.7 | 2.1 | 26.5 | 6.3 | 3.2 | 35 | |
| 331K | 4.5 | 1.3 | 10.5 | 4.5 | 1.5 | 12.0 | 4.9 | 1.6 | 15.0 | 4.9 | 1.7 | 19.5 | 5.8 | 2.1 | 26.5 | 6.6 | 3.4 | 35 | |
| 361K | 4.7 | 1.8 | 10.5 | 4.6 | 1.9 | 12.0 | 5.0 | 1.9 | 15.0 | 5.0 | 2.1 | 19.5 | 6.0 | 2.3 | 26.5 | 6.8 | 3.6 | 35 | |
| 391K | 4.8 | 2.0 | 11.0 | 4.8 | 2.0 | 12.5 | 5.2 | 2.2 | 15.0 | 5.2 | 2.2 | 19.5 | 6.2 | 2.4 | 26.5 | 7.1 | 3.9 | 35 | |
| 431K | 5.1 | 2.1 | 11.0 | 5.1 | 2.0 | 12.5 | 5.5 | 2.5 | 15.0 | 5.5 | 2.5 | 19.5 | 6.6 | 2.7 | 26.5 | 7.2 | 3.3 | 35 | |
| 471K | 5.2 | 2.2 | 11.0 | 5.2 | 2.3 | 12.5 | 5.6 | 2.6 | 15.0 | 5.6 | 2.7 | 19.5 | 6.8 | 2.9 | 27.0 | 7.4 | 3.5 | 35 | |
| 511K | 5.6 | 2.5 | 11.5 | 5.6 | 2.5 | 12.5 | 5.8 | 3.1 | 15.0 | 5.8 | 3.1 | 20.0 | 7.0 | 3.3 | 27.0 | 7.6 | 3.8 | 35 | |
| 561K | 5.7 | 2.8 | 11.5 | 5.7 | 2.8 | 12.5 | 6.1 | 3.4 | 15.0 | 6.1 | 3.4 | 20.0 | 7.3 | 3.6 | 27.0 | 7.9 | 4.0 | 35 | |
| 621K | 6.0 | 3.1 | 11.5 | 6.0 | 3.1 | 12.5 | 6.4 | 4.0 | 15.0 | 6.4 | 3.8 | 20.0 | 7.6 | 4.1 | 27.0 | 8.2 | 4.4 | 35 | |
| 681K | 6.3 | 3.4 | 11.5 | 6.3 | 3.4 | 12.5 | 6.8 | 4.4 | 15.0 | 6.8 | 4.1 | 20.0 | 8.0 | 4.4 | 27.0 | 8.3 | 4.7 | 35 | |
| 751K | 6.7 | 3.7 | 11.5 | 6.8 | 3.7 | 12.5 | 7.2 | 4.4 | 15.0 | 7.2 | 4.3 | 20.0 | 8.4 | 4.5 | 27.0 | 8.7 | 5.0 | 35 | |
| 781K | / | / | / | 7.0 | 3.9 | 12.5 | 7.3 | 4.6 | 15.0 | 7.3 | 4.6 | 20.0 | 8.6 | 4.8 | 27.0 | 8.9 | 5.2 | 35 | |
| 821K | / | / | / | 7.2 | 4.1 | 12.5 | 7.6 | 4.6 | 15.0 | 7.6 | 4.6 | 20.0 | 8.8 | 4.8 | 27.0 | 9.1 | 5.4 | 35 | |
| 911K | / | / | / | / | / | / | 8.2 | 5.4 | 16.0 | 8.2 | 5.4 | 20.5 | 9.3 | 5.7 | 27.0 | 9.6 | 5.9 | 35 | |
| 102K | / | / | / | / | / | / | 8.5 | 5.4 | 16.0 | 8.6 | 5.6 | 20.5 | 9.9 | 5.8 | 27.0 | / | / | / | |
| 112K | / | / | / | / | / | / | 9.1 | 5.7 | 16.0 | 9.1 | 6.1 | 20.5 | 10.3 | 6.3 | 27.0 | / | / | / | |
| 122K | / | / | / | / | / | / | 9.9 | 6.3 | 17.0 | 10.0 | 6.7 | 21.0 | 11.3 | 6.9 | 27.5 | / | / | / | |
| 142K | / | / | / | / | / | / | 10.7 | 7.4 | 17.5 | 10.9 | 7.8 | 21.5 | 12.8 | 8.0 | 28.0 | / | / | / | |
| 162K | / | / | / | / | / | / | 11.5 | 8.6 | 17.5 | 11.8 | 9.0 | 21.5 | 13.0 | 9.2 | 28.5 | / | / | / | |
| 182K | / | / | / | / | / | / | 12.6 | 9.8 | 17.5 | 12.8 | 10.2 | 21.5 | 13.5 | 10.4 | 29.0 | / | / | / | |

Tape and Reel Dimensions

1/2" pitch

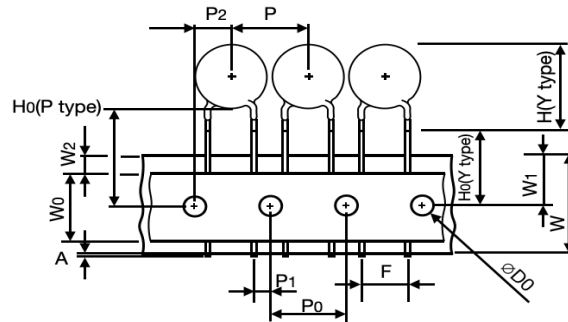


1.0" pitch

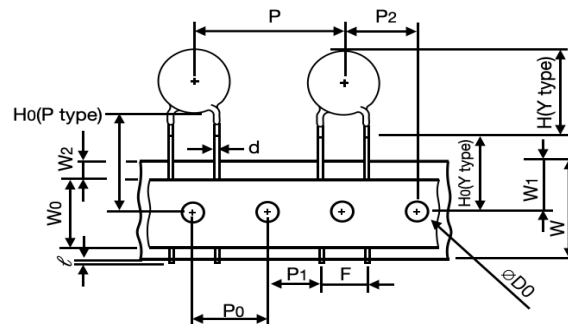


| Symbols | Item | 5 / 7 mm | 10 / 14 mm | 20mm |
|------------|--|---|---|---------------|
| A | Cut out length | 1.1 mm max. | 1.1 mm max. | |
| H (Y type) | Height of Top | See H max. table | | |
| H0(Y type) | Height to seating plane | 16.0 ± 0.5 mm (*± 1.0 mm) | 16.0 ± 0.5 mm (*± 1.0 mm) | |
| H0(P type) | Height of component from hole center | 16.0 ~ 21.0 mm | 16.0 ~ 21.0 mm | |
| Δh | Front to back deviation | 0 ± 2.0 mm | 0 ± 2.0 mm | |
| W | Carrier tape width | 18 ^{+1.0} _{-0.5} mm | 18 ^{+1.0} _{-0.5} mm | |
| W0 | Hold down tape width | 10.0 mm | 12.0 mm | |
| W1 | Sprocket hole position | 9.0 ^{+0.75} _{-0.5} mm | 9.0 ^{+0.75} _{-0.5} mm | |
| W2 | Adhesive tape position | 3.0 mm max. | 3.0 mm max. | |
| F | Component lead spacing | 5.0 ± 1.0 mm | 7.5 ± 1.0 mm | 10.0 ± 1.0 mm |
| P | Pitch of component | 12.7 ± 1.0 mm | 25.4 ± 1.0 mm | |
| P0 | Sprocket hole pitch | 12.7 ± 0.3 mm | 12.7 ± 0.3 mm | |
| P1 | Lead length from hole center to lead | 3.85 ± 0.7 mm | 8.95 ± 0.7 mm | 7.7 ± 0.7 mm |
| P2 | Length from hole center to disk center | 6.35 ± 1.3 mm | 12.7 ± 1.3 mm | |
| D0 | Sprocket hole diameter | 4.0 ± 0.2 mm | 4.0 ± 0.2 mm | |
| d | Lead wire diameter | 0.6 ± 0.05 mm | 0.8 ± 0.05 mm | 1.0 ± 0.05 mm |
| T | Disk thickness | See T max. table | See T max. table | |
| t1 | Total thickness tape | 0.7 ± 0.05 mm | 0.7 ± 0.05 mm | |
| t2 | Total thickness | 1.6 mm max. | 1.8 mm max. | |

Marking and Packaging

MARKING

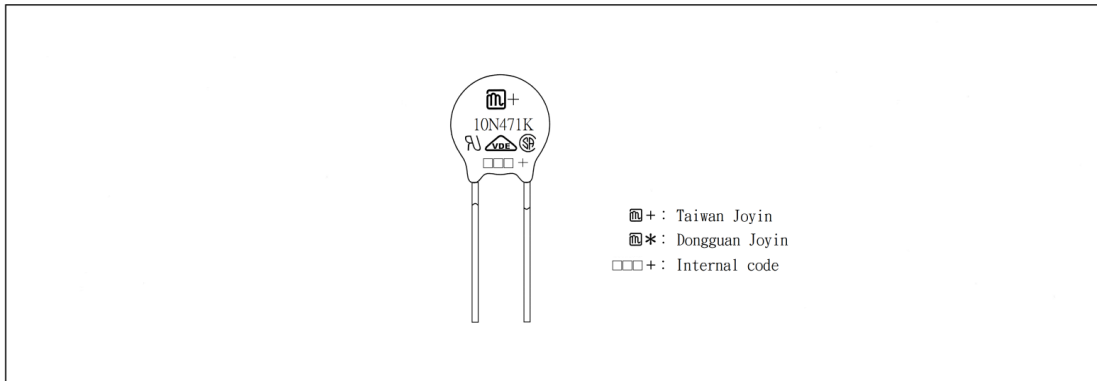

PACKAGING

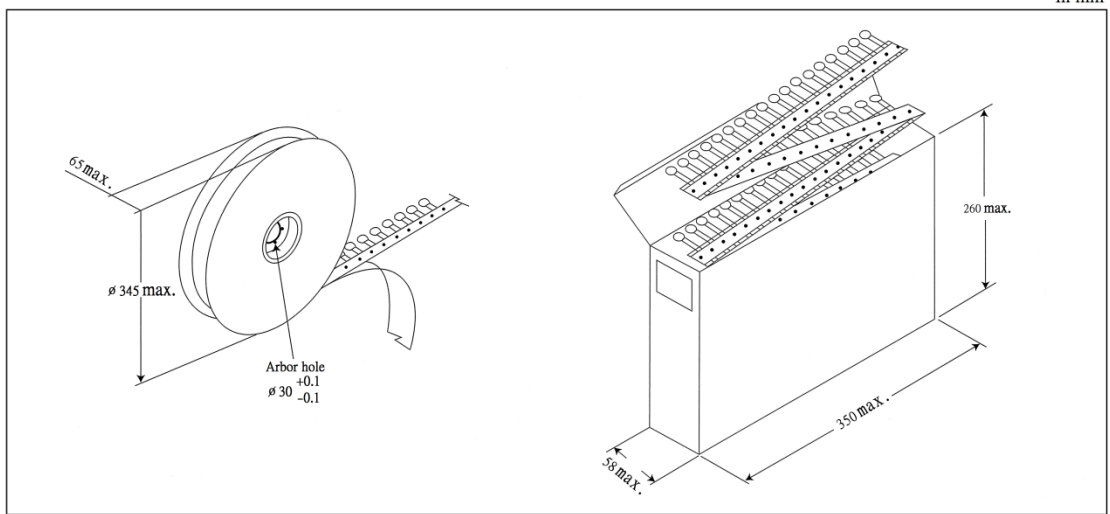

| Series Part No. | 5mm | | | 7mm | | | 10mm | | | 14mm | | | 20mm | | | 25mm |
|--------------------|------------|------|------|------------|------|------|------------|------|------|------------|------|------|------------|------|------|------------|
| | Bulk (Box) | Reel | Ammo | Bulk (Box) | Reel | Ammo | Bulk (Box) | Reel | Ammo | Bulk (Box) | Reel | Ammo | Bulk (Box) | Reel | Ammo | Bulk (Box) |
| 180M ~ 470K | 5000 | 1500 | 1500 | 5000 | 1500 | 1500 | 2500 | 1000 | 500 | 1500 | 750 | 500 | 750 | 500 | 500 | - |
| 560K ~ 680K | 5000 | 1500 | 1000 | 5000 | 1500 | 1000 | 2500 | 1000 | 500 | 1500 | 750 | 500 | 750 | 500 | 500 | - |
| 820K ~ 391K | 5000 | 1500 | 1500 | 5000 | 1500 | 1500 | 2500 | 1000 | 500 | 1500 | 750 | 500 | 750 | 500 | 500 | 750 |
| 431K ~ 471K | 5000 | 1500 | 1000 | 5000 | 1000 | 1000 | 2000 | 750 | 500 | 1500 | 750 | 500 | 750 | 500 | 500 | 750 |
| 511K ~ 821K | 4000 | 1000 | 1000 | 4000 | 1000 | 1000 | 1500 | 500 | 500 | 750 | 500 | 500 | 450 | 500 | 500 | 450 |
| 911K ~ 122K | - | - | - | - | - | - | 1500 | 500 | 350 | 750 | 500 | 350 | 450 | - | - | 450 |
| 142K ~ 182K | - | - | - | - | - | - | 750 | - | - | 450 | - | - | 300 | - | - | - |

| Packaging | Bulk (Box) | Reel | Reel (14 mm, 20 mm) | Ammo (5 mm, 7 mm) | Ammo (10 mm, 14 mm) | Ammo (20 mm) |
|--------------------|-----------------|----------------------|---------------------|-------------------|---------------------|-----------------|
| Box size (mm) | 290 × 155 × 110 | 350 × 350 × 105 | 346 × 346 × 72 | 335 × 245 × 43 | 347 × 246 × 50 | 348 × 255 × 60 |
| Carton size (mm) | 328 × 310 × 250 | 370 × 370 × 590 | 370 × 370 × 468 | 515 × 354 × 258 | 515 × 364 × 246 | 535 × 365 × 275 |
| One carton with | 4 Boxes | 5 Boxes (10 reels) | 6 Boxes (6 reels) | 10 Boxes | 8 Boxes | 8 Boxes |