

1

2

3

4





5

A

B

C

D

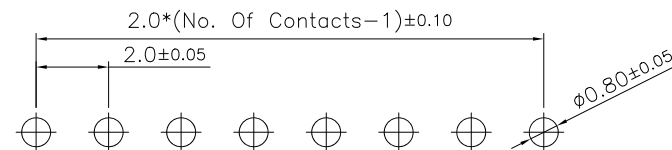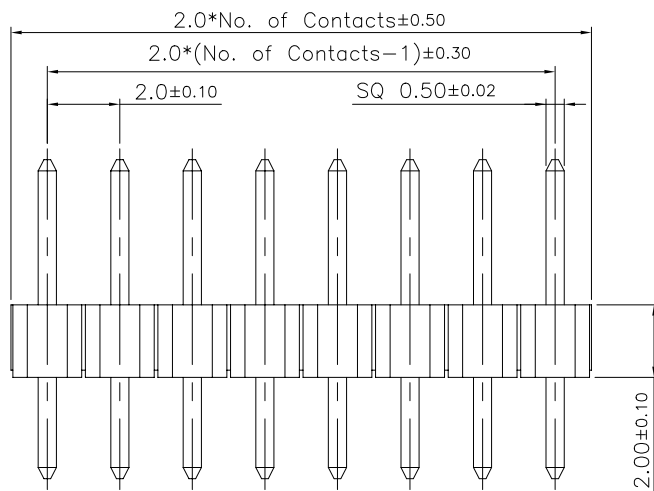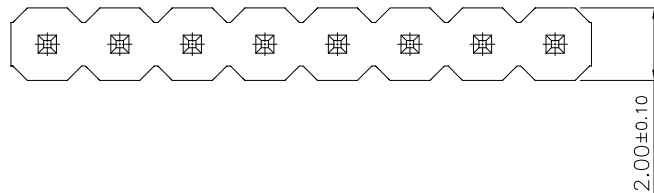

P.C.B Layout

Specifications:

Current Rating: 2.0A AC,DC

Voltage Rating: 250V AC,DC

Contact Resistance: 20m ohm.Max

Insulation Resistance: 1000M ohm.Min

Withstanding Voltage: 500V AC/Minute

Operating Temperature Range: -40°C ~ +105°C

Material:

Insulator: Thermoplastic (UL94V-0)

Insulator Color: Black

Contact: Copper Alloy

Plated: Gold/Matte Tin/Selective Gold Plated

How To Order

2210S-XXX

G:Gold Plated



MT:Matte Tin Plated

SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.

No. of Contacts

Straight Type

RoHS Compliant

F				DRAWN: Jamie Chuang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	DESCRIPTION: 2.0mm Pin Header Straight Type	SIZE A4
E								
D				CHECKED: Jerry Chen	UNIT: MM	PART NO: 2210S-XXX		
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1			
A	23-SEP-2024		Jamie		PROJECTION: 			
REV	DATE	FILE	BY					