

**DIL - CRYSTAL, RELAY AND DISPLAY PARTIALLY EQUIPPED, SOLDER TAIL**

Series **DIL - Crystal, relay and display partially equipped, Solder tail**  
 110 2.54 mm, Crystal and relay sockets, Partially equip, Solder tail

Partially equipped DIL sockets

**Technical specs.:**

Insulator: Black glass filled polyester  
 PCT-GF30-FR  
 Flammability: UL 94V-O  
 Sleeve: Brass CuZn36Pb3 (C36000)  
 Contact: Clip (4 finger): Beryllium copper (C17200)  
 Accepted pin Ø: 0.40 to 0.56 mm  
 Insertion force: 2 N typ.  
 Withdrawal force: 1 N typ.  
 (polished steel gauge Ø 0.43 mm)  
 Mechanical life: Min. 100 cycles  
 Rated current: 1 A  
 Contact resistance: Max. 10 mΩ  
 Dielectric strength: Min. 1000 V RMS




**Ordering information RoHS-compliant parts**

PP Plating code Sleeve Clip  
**87 Tin Gold flash**  
 83 Tin Gold 0.75 µm

Other pin count and arrangement please consult

General technical specs. ...

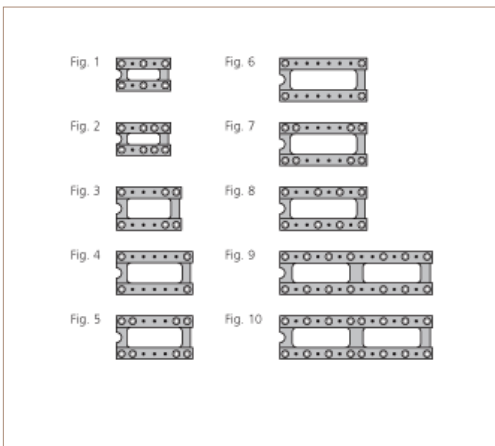

Poles	A	B	C	D	E	See	Order Codes
Total 10 Equip. 6	12.6	5.08	7.6			Fig. 1	110-PP-210-01-742101
Total 10 Equip. 8	12.6	5.08	7.6			Fig. 2	110-PP-210-01-839101
Total 12 Equip. 6	15.2	7.62	10.1			Fig. 3	110-PP-312-01-680101
Total 14 Equip. 4	17.7	7.62	10.1			Fig. 4	110-PP-314-10-001101
Total 14 Equip. 8	17.7	7.62	10.1			Fig. 5	110-PP-314-10-002101
Total 16 Equip. 4	20.3	7.62	10.1			Fig. 6	110-PP-316-01-822101
Total 16 Equip. 8	20.3	7.62	10.1			Fig. 7	110-PP-316-01-931101
Total 16 Equip. 8	20.3	7.62	10.1			Fig. 8	110-PP-316-10-003101
Total 28 Equip. 14	35.5	7.62	10.1			Fig. 9	110-PP-328-01-777101
Total 28 Equip. 16	35.5	7.62	10.1			Fig. 10	110-PP-328-01-762101