


Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
Standard : Nylon-9T
- Contact Plated : Standard:Full Gold Flash

Recommended P.C. Board SMD Layout

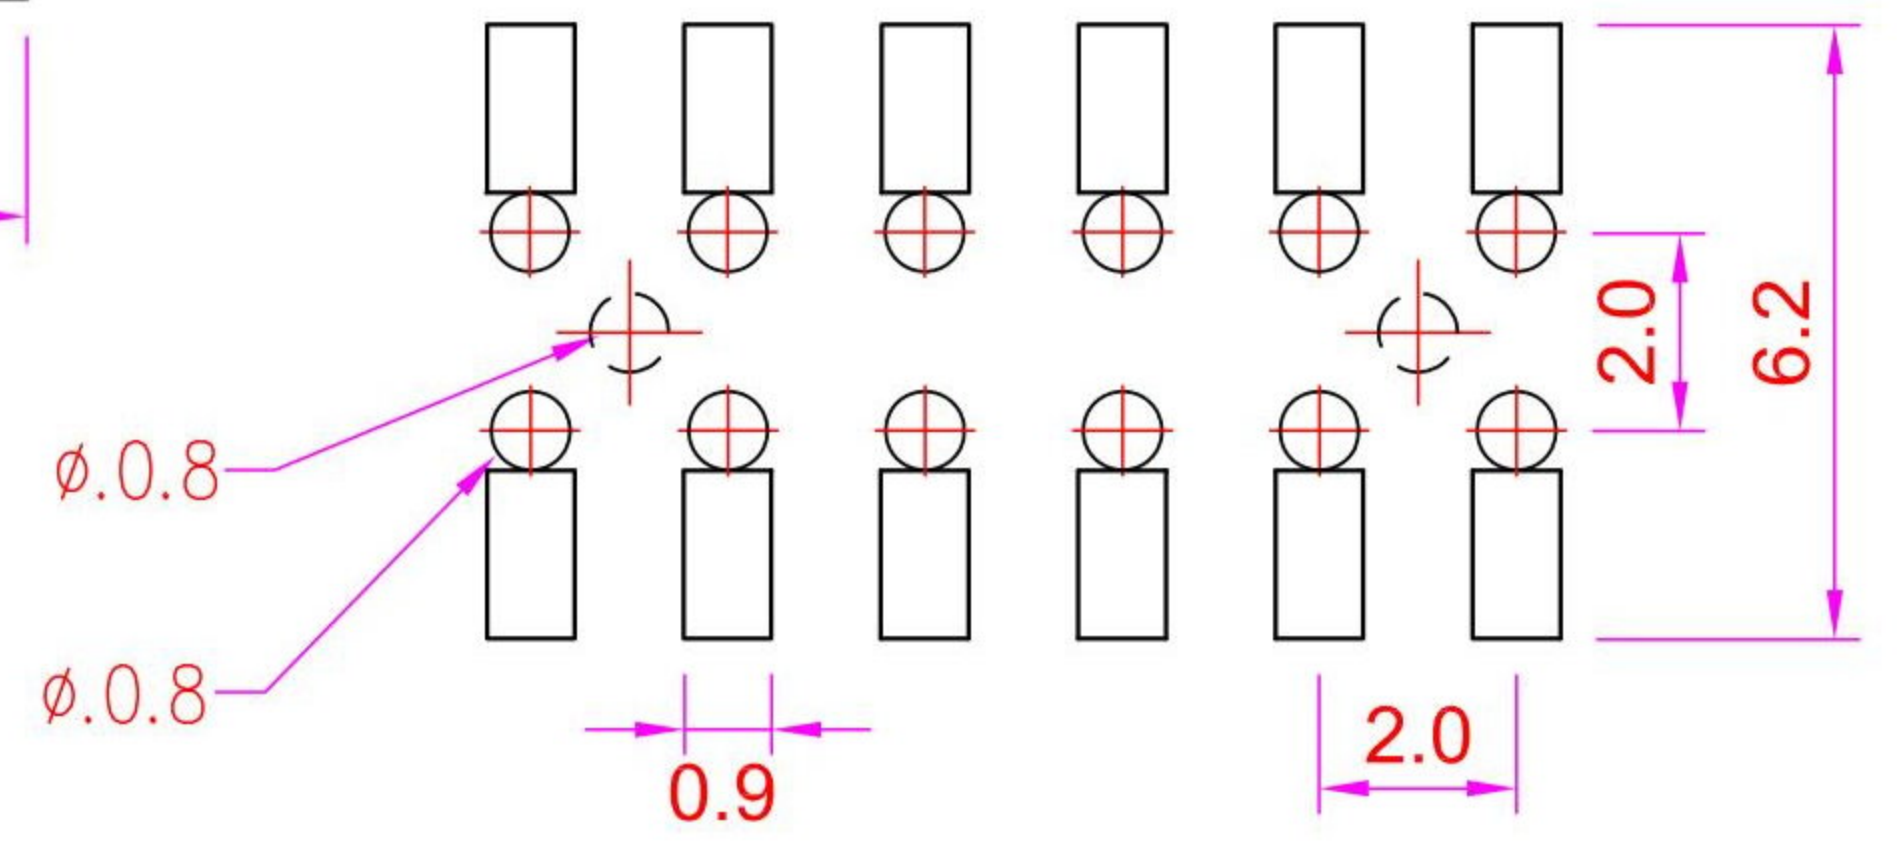

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差	PART NAME 品名 2.0x2.0mm FEMALE HEADER DUAL ROW SMT TYPE H=2.0mm 2XXXP GOLD FLASH PLATING WITHOUT LOCATING PEG INSULATOR MATERIAL: NYLON 9T METAL PAD+TUBE PACKING ROHS
DWG. 製圖 ABBY		UNIT 單位 MM	
DATE 制表日 2017/08/11	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C6809-XXBDGHNNB